
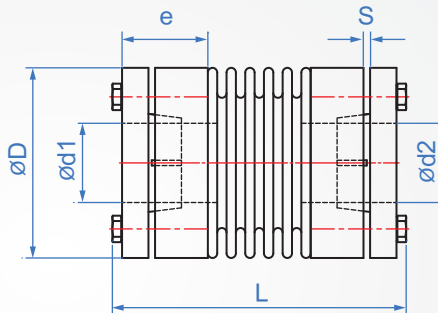


Bellows type

## GZ439

Keyless

Ontology	Bellows	Stop screw
SUS304	SUS	SUS



### How to order

1 2  
 GZ439 - 55 - 10x10  
 TYPE      D      d1xd2

1		2		unit : mm								
D	Inner hole designation d1-d2		L	e	S	M	Weight(g)	Max. torque (N · m)	Max. return speed (rpm/min)	Moment of inertia (kg · m <sup>2</sup> )	Static torsion spring coefficient (N · m/rad)	Allowable axial displacement (mm)
	min.	max.										
55	10	~ 20	75	20.5	3	M2.5	390	30	6000	2.8 x 10 <sup>-4</sup>	3.5x10 <sup>4</sup>	-1.5 ~ +0.7
65	12	~ 28	90	28.2		M5	780	60	5000	4.5 x 10 <sup>-4</sup>	6.8x10 <sup>4</sup>	
82	16	~ 40	105	30	4	M6	1512	120	4600	1.1 x 10 <sup>-4</sup>	1.2x10 <sup>4</sup>	
105	18	~ 50	140	51.1		M8	3800	320	3000	3.4 x 10 <sup>-4</sup>	1.8x10 <sup>5</sup>	

Allowable declination : 2°