



樹脂齒輪 壓力角20°

## M3-M5

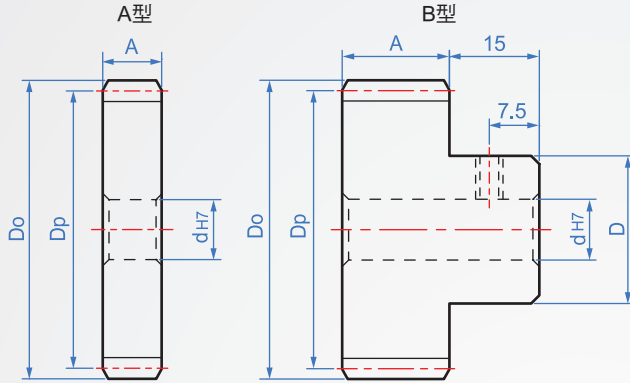

Ⓜ P孔型時，M螺紋尺寸請參照小圖下方。

材質

顏色

GW	POM 塑鋼	白色
GB		黑色
GM	MC 尼龍	藍色
GK	PEEK 塑鋼	卡其色

How to order

① ② ③ ④ ⑤

TYPE 齒數 模數 A 輪形 孔形

選擇材質與顏色

白色POM.....GW  
 黑色POM.....GB  
 MC.....GM  
 PEEK.....GK

B形可指定D徑變更  
 例：原D徑 75，可變更為73.....D73

① ② ③ ④ ⑤ 單位：mm

版權所有 製必究

齒數	模數	齒面寬度 A	外形	孔形	最小孔徑 d	輪轂 D	齒數	分度圓徑 Dp	齒頂 Do					
12	M3	25.4	A	H 圓孔	8~	28	12	36	42					
13						30	13	39	45					
14						32	14	42	48					
15						36	15	45	51					
16						38	16	48	54					
18						40	18	54	60					
20						50	20	60	66					
22						54	22	66	72					
24						58	24	72	78					
25						60	25	75	81					
26						65	26	78	84					
28						70	28	84	90					
30						M4	31.75	A	圓孔+攻牙	12~	75	30	90	96
32											32	96	102	
35	35	105	111											
36	36	108	114											
40	40	120	126											
45	45	135	141											
48	48	144	150											
50	50	150	156											
55	55	165	171											
60	60	180	186											
12	M5	25.4	B	鍵槽+攻牙	10~						35	12	48	56
15											45	15	60	68
16											50	16	64	72
18											55	18	72	80
20						65	20	80	88					
22						73	22	88	96					
25						84	25	100	108					
30						100	30	120	128					
32						32	128	136						
12						M5	44.5	A	圓孔	15~	46	12	60	70
15											60	15	75	85
16											65	16	80	90
18											70	18	90	100
20											82	20	100	110
22	95	22	110	120										
25	105	25	125	135										
30	30	150	160											
32	32	160	170											

※齒數資料不及備載，詳細請查詢加納網站  
 ※D徑尺寸可依據設計變更。