





Blocking screw

AF115 For positioning

Straight : M8~M12

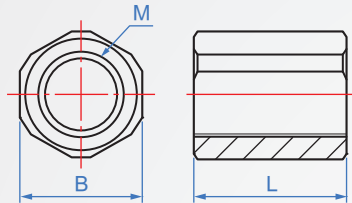

Flange : M14~36

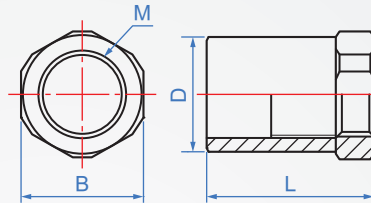

Ontology

Surface treatment

Distinguish

Steel


Nickel plating

M8~M10

Dyed black

M14~M36

Use case:



How to order

1 2 3
 AF115 - M8 - 1.0 - 15
 TYPE M Pitch L

Purpose: The blocking (positioning) nut used in the AC series can effectively set the stroke of the hydraulic buffer.

| 1 Thread | | 2 | 3 | unit:mm | | |
|----------|-------|-------|------|---------|------|--|
| M | Pitch | L | B | C | D | |
| M8 | 0.75 | 15 | 11 | 12.6 | - | |
| | 1.0 | | | | | |
| M10 | 1.0 | 17 | 12.7 | 14.5 | | |
| M12 | 1.0 | 20 | 14 | 16 | | |
| M14 | 1.0 | 28 | 19 | 21.6 | 18.5 | |
| | 1.5 | | | | | |
| M20 | 1.5 | 36 | 26 | 29.7 | 25 | |
| M25 | 1.5 | 46、66 | 32 | 36.7 | 31.5 | |
| | 2.0 | 66 | | | | |
| M36 | 1.5 | 80 | 46 | 53 | 45 | |

Che Na

FAX 886-2688-3177

info@chena.com.tw

886-22688-3188
886-2688-3881~3No.21, Guangrong St. Shulin Dist.,
New Taipei City 238 Taiwan (R.O.C.)