


Coarse thread
IP641


Main part	d Pin	Spring	Affiliated nuts
Galvanized steel	SUS303	SUS301	Galvanized steel
SUS303			SUS301



D knob: Mat black nylon 6

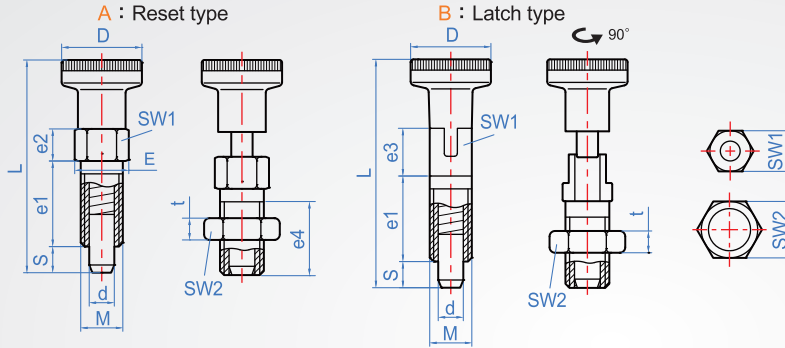

How to order



- Explanation : Indexing Plunger applies to the case of manually positioning. Generally d pin is convex state.
- Reset type : 1.Pull the knob up, latch sink into the body, positioning can be relieved.
2.Release knob, the force of the internal spring can restore pin protruding state.
- Latch type : 1.Pull the knob up and rotate 90 degrees, latch sink into the body, positioning can be relieved.
2.Rotate 90 degrees and release knob, the force of the internal spring can restore pin protruding state.

M	Coarse thread Pitch	d -0.02 -0.04	S	L		D	E	e1	e2	e3	e4	t	sw1	sw2	Spring load (N)	Weight(g)	
				Reset type	Latch type											Reset type	Latch type
M6	1.0	3	3.5	30	32.5	12	6.9	12	4.5	7	10	3.2	6	10	3 ~ 12	9	8
			4	30.5	33												
M8	1.25	5	5	40	43.5	16	9.2	16	6	9.5	13.5	4	8	13	5 ~ 24	15	16
M10	1.5	6	6	49	52	18	11.5	20	7.5	10.5	17	5	10	16	5 ~ 21	24	15
M12	1.75	8	8	59	63.5	21	13.8	24	9	13.5	20.5	6	12	18	6 ~ 22	41	46

kgf=N×0.102

Copyright © CHENA INDUSTRIAL CO.,LTD ALL Rights Reserved.