


斜銷附內牙

WA664

1 : 50

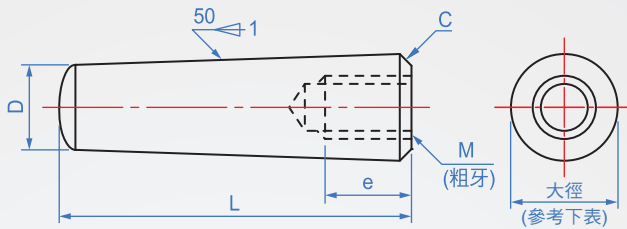

材質

熱處理

S45C

HRC40~45

How to order

WA664 - ① 6 - ② 25
 TYPE 外徑 長度

單位 : mm														
① D 公差	5	6		8		10		12		13		16		12
	+0.03 -0	+0.03 -0		+0.036 -0		+0.036 -0		+0.043 -0		+0.043 -0		+0.043 -0		+0.052 -0
螺牙區分	M3	L-50		L-50		L-60		L-70		L-70		L-80		M12
		以下	以上	以下	以上	以下	以上	以下	以上	以下	以上	以下	以上	
M(粗牙)		M4	M5	M5	M6	M6	M8	M8	M10	M8	M10	M10	M12	
e(深度)	5	5	6	6	8	8	10	10	12	10	12	12	14	14
C	0.7	0.9		1.2		1.5		2		2		2.5		3
R	5	6		10		10		16		16		16		20

單位 : mm									
② L長度	大徑尺寸參考表								
20	5.4	6.4	8.4						
25	5.5	6.5	8.5	10.5					
30	5.6	6.6	8.6	10.6	12.6	13.6			
35	5.7	6.7	8.7	10.7	12.7	13.7			
40	5.8	6.8	8.8	10.8	12.8	13.8	16.8		
45	5.9	6.9	8.9	10.9	12.9	13.9	16.9	20.9	
50	6	7	9	11	13	14	17	21	
55	6.1	7.1	9.1	11.1	13.1	14.1	17.1	21.1	
60	6.2	7.2	9.2	11.2	13.2	14.2	17.2	21.2	
65		7.3	9.4	11.3	13.3	14.3	17.3	21.3	
70		7.4	9.3	11.4	13.4	14.4	17.4	21.4	
75			9.5	11.5	13.5	14.5	17.5	21.5	
80			9.6	11.6	13.6	14.6	17.6	21.6	
85			9.7	11.7	13.7	14.7	17.7	21.7	
90			9.8	11.8	13.8	14.8	17.8	21.8	
100			10	12	14	15	18	22	
110				12.2	14.2	15.2	18.2	22.2	
120				12.4	14.4	15.4	18.4	22.4	
130					14.6	15.6	18.6	22.6	
140					14.8	15.8	18.8	22.8	
150					15	16	19	23	

版權所有 重製必究