

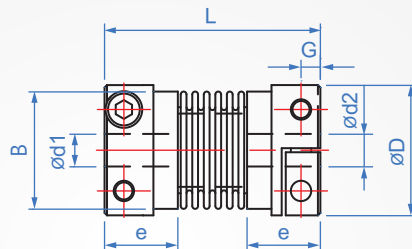
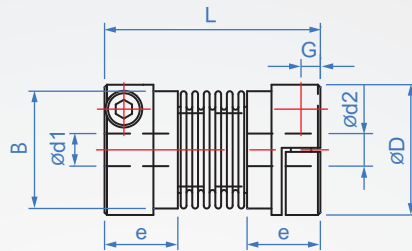


Bellows type
GZ437
Clamping



Ontology	Bellows	Stop screw
AL-High strength aluminum alloy (Anodizing)	Stainless steel	CM435 (Dye black)
SUS		SUS

How to order



Select the body material
AL-High strength aluminum alloy.. blank
SUS..... SUS

D	Inner hole designation d1-d2 min. max.	B	L	e	G	M	Max. torque (N · m)		Max. return speed (rpm/min)	Moment of inertia (kg · m ²)	Static torsion spring coefficient (N · m/rad)	Allowable axial displacement (mm)	Allow eccentricity (mm)	Weight(g)	
							AL	SUS						AL	SUS
							unit : mm								
16	4 ~ 8	13.5	27	9.5	3	M2.5	0.8	1.2	9400	8 x 10 ⁻⁷	150	-1.0 ~ +0.3	0.1	8	23
20	5 ~ 12	18	32	10		M3	1.5	2.2	7600	2.2 x 10 ⁻⁶				220	13
22.5	5 ~ 12	20.2	34	10.85	3.2		M3	1.8	2.7	6000	6.5 x 10 ⁻⁶	300	-1.3 ~ +0.5	0.15	22
25	6 ~ 12		37	12.5	4.5	M4		2	3	6100	6.9 x 10 ⁻⁶				330
32	8 ~ 15	27.2	42	12	5		M4	2.5	3.7	4700	2.1 x 10 ⁻⁵	490	-1.5 ~ +0.7	0.2	53
40	8 ~ 20	34.5	55	17.5		M5	10	15	4200	2.3 x 10 ⁻⁵	530				97
55	10 ~ 25	51.9	72	22.5	10	M6	22	33	3900	3.7 x 10 ⁻⁵	860	-1.5 ~ +0.7	0.2	200	735
65	10 ~ 38	60.5	81	26.5			10.5	55	80	3500				3.6 x 10 ⁻⁵	900
82	20 ~ 42	76.3	103	33.4	10	M8	70	102	3500	6.0 x 10 ⁻⁵	1200	-1.8 ~ +0.8	0.2	1090	1900
105	20 ~ 50	100.7	130	51.5		M10	200	290	3000	1.8 x 10 ⁻⁴				2067	2500

Allowable declination : 2°

Copyright © CHENA INDUSTRIAL CO., LTD ALL RIGHTS RESERVED.