
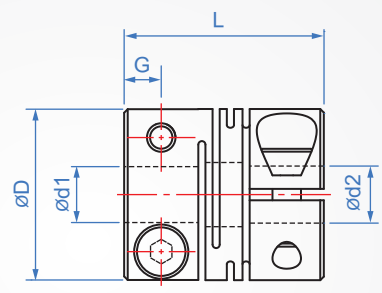


Slotted - Economical short
GZ402
 Clamping

Ontology	Hexagon socket head cap screws
AL High strength aluminum alloy (White anode)	CM435 (Dye black)
SUS	SUS



How to order

GZ402 - 16 - 3x5 -

TYPE D d1xd2

Select the body material
 AL-High strength aluminum alloy... Blank
 SUS..... SUS

D	Inner hole designation d1-d2		L	G	M	Max. torque (N · m)		Maximum return speed (rpm/min)		Moment of inertia (kg · m ²)		Static torsion spring coefficient (N · m/rad)		Allowable axial displacement (mm)	Weight(g)	
	min.	max.				AL	SUS	AL	SUS	AL	SUS	AL	SUS		AL	SUS
	unit : mm															
16	3	~ 5	16	2.85	M2.5	0.5	0.9	10000	9500	2.4x10 ⁻⁷	9.0x10 ⁻⁷	44	84	±0.2	8	15
20	4	~ 8	20	3.75	M3	1	1.6	7600	7600	8.8x10 ⁻⁶	2.5x10 ⁻⁶	110	245		14	35
25	5	~ 12	25	4.84		2	3	6100	6100	2.3x10 ⁻⁶	6.3x10 ⁻⁶	165	720		26	66
32	8	~ 16	32	5.3	M4	4	6	5000	5000	8.8x10 ⁻⁶	2.2x10 ⁻⁵	228	1300		56	145
40	10	~ 20	50	6.23	M5	8	15	6000	3600	3.0x10 ⁻⁵	8.9x10 ⁻⁵	340	950		135	300
50	10	~ 28		8.3	M6	15	23	3000	5800	9.0x10 ⁻⁵	2.7x10 ⁻⁴	580	1380		220	600

Allowable declination:1.5°