



High rigid metal disk coupling

CH418

Set screw

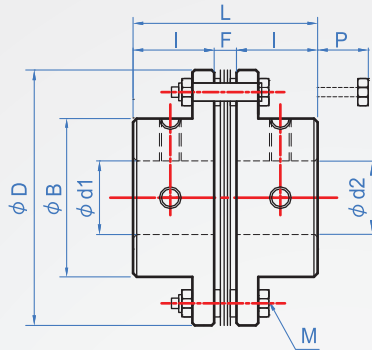

Material	Screw assembly	Shrapnel
S45C (Black oxide)	Steel	SUS

How to order

CH418 - 68 - 11x15
 | | |
 TYPE D d1xd2

1		2		Unit : mm													
D	d1-d2 min. max.	B	L	I	F	H	M	P	Torque (N · m)	Max. torque (N · m)	Highest number of rotations (rpm/min)	Moment of inertia (kg · m ²)	Allowable displacement (mm)	Allowable axial declination (°)			
68	10 ~ 25	40	56	25	6	28	4-M6	13	40	80	20000	3	±0.8	1			
82	12 ~ 35	54	56.2	25	6.2	34			80	160	17000	8.7	±1.0				
94	12 ~ 38	58	69.6	30	9.6	40	4-M8	23	180	360	15000	16	±1.2				
104	20 ~ 45	68	76	33	10	42			20	245	490	13000	26		±1.4		
126	20 ~ 50	78	91	40	11	50	4-M10	25	441	882	11000	65	±1.6				
144	20 ~ 60	88	102	45	12	57			20	780	1560	9000	99		±1.8		
168	30 ~ 70	104	164	75	14	108	6-M10	—	1170	2340	5100	238	±1.0				
180	30 ~ 85	120	176	80	16	115			—	1960	3920	4800			365		
215	40 ~ 90	128	200	90	20	128	6-M16	—	4903	9806	4300	830					

※Remove the screw must be add the P unit distance.

Copyright © CHENA INDUSTRIAL CO., LTD ALL RIGHTS RESERVED.

Che Na

FAX 886-2688-3177

info@chena.com.tw

886-22688-3188
886-2688-3881~3

No.21, Guangrong St. Shulin Dist.,
New Taipei City 238 Taiwan (R.O.C.)