


Nut-Install before  
**TT911**






Nut-Install before




First load holder



Object	Material	Finish
Nut-Install before	S10C quite	Trivalent chromium
First load holder	PP Resin	Black

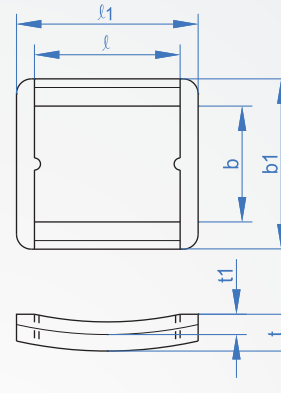

How to order



Unit : mm

Groove width	M Coarse thread	Nut-Install before dimensions						No. (Aluminum extrusion series)	First load holder dimensions						
		A	B	e	L	T	Quality(g)		b1	b2	l1	l2	t	t1	Quality(g)
6	M3、M4、M5	5.8	10	0.8	10	4.1	2	20	10.4	11.6	10.2	12.6	2.5	0.9	0.09
8	M3、M4、M5、M6	7.8	15	0.8	14	6.3	8	30	15.2	16.4	14.2	14.2	3.9	3.2	0.2
10	M4、M5、M6、M8	9.8	17	3	17	9.0	14	40、45	17.2	19.4	17.2	20	3.6	2.6	0.3

※40、45 series are shared use.  
※First load holder shall be used with the nut.