
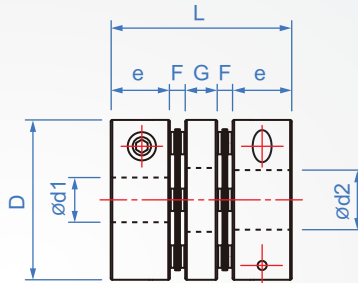


Round steel sheet long type

GL412

Clamped



Ontology

High strength aluminum alloy (White anode)

Disc.Pin

stainless steel

Hexagon socket head cap screws

SCM435 (Dye black)

How to order

GL412 - 20 - 5-8
 TYPE D d1xd2

													unit : mm	
D	Inner hole designation d1-d2		L	e	G	F	M	Max. torque (N · m)	Max. revolutions (rpm/min)	Moment of inertia (kg · m ²)	Static torsion spring coefficient (N·m/rad)	Allow eccentricity (mm)	Allowable declination (°)	Weight g
	min.	max.												
16	3	~ 6	23.2	8	6.6	0.3	M2.5	0.9	6000	2.7×10 ⁻⁷	450	±0.2	2	12
20	5	~ 8	26	9	7.4			1.3	5500	8.0×10 ⁻⁷	700			26
25	5	~ 10	30.2	10.5	8	0.6	M3	2.8	5000	2.5×10 ⁻⁶	950	±0.3		45
32	8	~ 14	41	14.05	11.1	0.9	M4	5	4000	6.6×10 ⁻⁶	1100	±0.4		73
40	10	~ 18	47	16.9	10.8	1.2	M5	9	3800	1.9×10 ⁻⁵	2800	±0.5		100
50	10	~ 24	53	19.75	10.5	1.5		16	3500	5.0×10 ⁻⁴	3400	±0.6		193