

KG-Keyless Pulleys

5M

Pitch 5mm


Keyless Pulleys

Extra over product

Final product




Y Bulge Type

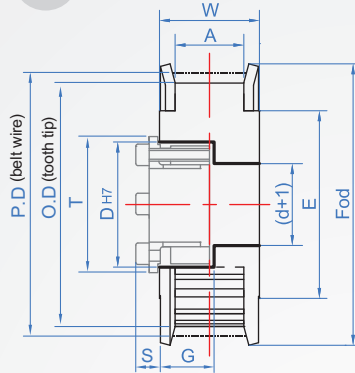

Z Bury Type

When $(S+1)+G \geq W$ the bottom in through hole.



※KG series does not include the power lock. Please select in LP458 series if necessary.



Main Part	Flang	Finish
A6201	Aluminum	AS Clear anodizing
		AB Black anode
		AK Electroless nickel
S45C	Iron	AN Electroless nickel
		TB Black oxide
		TN Electroless nickel

How to order

KG - 23 - 5M-15 - Z15 -

1 TYPE Number of teeth 2 Tooth width 3 Wheel

Material and finish chosen

A6201+Clear anodizing.....	AS
A6201+Black anode.....	AB
A6201+Hard anodized.....	AK
A6201+Electroless nickel.....	AN
S45C+Black oxide.....	TB
S45C+Electroless nickel.....	TN

Number of teeth	Tooth width	Wheel	Type Y Applicable for aperture d				Type Z Applicable for aperture d			Number of teeth	P.D	O.D	E	Fod
			10	15	20	25	15	20	25					
20	5M-10 (A=11 W=16)	Bulge type Y	8	8	8	8	-	-	-	20	31.83	30.69	24	35
22			8~10	8~10	8~10	8~10	8	8	8	22	35.01	33.87	28	40
24			8~10	8~10	8~10	8~10	8	8	8	24	38.2	37.05	30	42
25			8~10	8~10	8~10	8~10	8	8	8	25	39.79	38.65	30	45
26			8~12	8~12	8~12	8~12	8~10	8~10	8~10	26	41.38	40.24	34	47
28			8~12	8~12	8~12	8~12	8~10	8~10	8~10	28	44.56	43.42	37	49
30			8~16	8~16	8~16	8~16	8~12	8~12	8~12	30	47.75	46.6	40	52
32			8~16	8~16	8~16	8~16	8~12	8~12	8~12	32	50.93	49.79	40	55
34			8~19	8~19	8~19	8~19	8~16	8~16	8~16	34	54.11	52.97	44	62
36			8~19	8~19	8~19	8~19	8~16	8~16	8~16	36	57.3	56.15	45	65
38	5M-15 (A=17 W=22)	Bulge type Y	10~22	10~22	10~22	10~22	8~12	8~12	8~12	38	60.48	59.34	52.5	67.5
40			10~22	10~22	10~22	10~22	8~12	8~12	8~12	40	63.66	62.52	52.5	67.5
42			10~25	10~25	10~25	10~25	8~12	8~12	8~12	42	66.85	65.7	58	71
44			10~25	10~25	10~25	10~25	8~12	8~12	8~12	44	70.03	68.89	59	73
46			10~25	10~25	10~25	10~25	8~12	8~12	8~12	46	73.21	72.07	60	80
48			10~30	10~30	12~30	12~30	10~19	10~25	10~25	48	76.39	75.25	65	83
50			10~30	10~30	12~30	12~30	10~19	10~25	10~25	50	79.58	78.43	65	85
60			10~35	14~35	14~35	14~35	10~19	10~25	10~25	60	95.49	94.35	80	100
70			10~40	14~50	14~50	14~50	10~19	10~25	10~25	70	111.41	110.27	98	118
72			10~40	14~50	14~50	14~50	10~19	10~25	10~25	72	114.59	113.45	98	118
80	10~40	14~60	14~60	14~60	10~19	10~25	10~25	80	127.32	126.18	110	135		
90	10~40	14~60	14~60	14~60	10~19	10~25	10~25	90	143.24	142.1	120	146		
100	10~40	14~60	14~60	14~60	10~19	10~25	10~25	100	159.15	158.01	130	165		

※CheNa can also design and manufacture parts other than the number of teeth and shaft diameter in the above table.

LP458 shaft sleeve size table

Unit : mm

d	8	10	12	14	15	16	18	20	22	24	25	28	30	32	35	38	40	45	50	55	60	65
D	21	23	26	28	29	30	32	38	40	42	43	46	48	50	57	60	62	67	72	77	82	87
G	15		18				22		23	24			25	27	28			29				
S	6		6.5				8			8.5			10			10.5			11			
T	23.5	25.5	28.5	30.5	31.5	32.5	34.5	42	44	46	47	50	52	54	62	65	67	72	77	83	87	92