


Pitch : 2.0mm

2GT



Width code	2	3	4	6	9	12	15	Unit weight (Width:1mm)
Ti Initial tension (N)	4.3	6.4	9.4	15.8	25.2	34.6	44.1	1.3 g/m
Td Pressing load (N)	0.27	0.4	0.59	0.99	1.6	2.2	2.8	

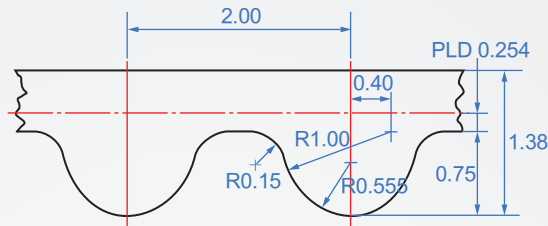

material : CR synthetic rubber, fiberglass thread.

Use temperature -10~50 ° C.

How to order



Perimeter code	Belt circumference mm	Number of teeth
54-2GT	54	27
60-2GT	60	30
66-2GT	66	33
72-2GT	72	36
74-2GT	74	37
76-2GT	76	38
78-2GT	78	39
80-2GT	80	40
82-2GT	82	41
84-2GT	84	42
86-2GT	86	43
88-2GT	88	44
90-2GT	90	45
92-2GT	92	46
94-2GT	94	47
96-2GT	96	48
98-2GT	98	49
100-2GT	100	50
102-2GT	102	51
106-2GT	106	53
108-2GT	108	54
110-2GT	110	55
112-2GT	112	56
114-2GT	114	57
116-2GT	116	58
120-2GT	120	60
122-2GT	122	61
124-2GT	124	62
126-2GT	126	63
128-2GT	128	64
130-2GT	130	65
132-2GT	132	66
134-2GT	134	67
136-2GT	136	68
138-2GT	138	69
140-2GT	140	70
142-2GT	142	71
144-2GT	144	72
146-2GT	146	73
148-2GT	148	74
150-2GT	150	75
152-2GT	152	76
154-2GT	154	77
156-2GT	156	78
158-2GT	158	79
160-2GT	160	80
164-2GT	164	82
166-2GT	166	83
168-2GT	168	84
172-2GT	172	86
174-2GT	174	87
176-2GT	176	88
178-2GT	178	89
180-2GT	180	90

Perimeter code	Belt circumference mm	Number of teeth
182-2GT	182	91
184-2GT	184	92
186-2GT	186	93
188-2GT	188	94
190-2GT	190	95
192-2GT	192	96
194-2GT	194	97
196-2GT	196	98
200-2GT	200	100
202-2GT	202	101
204-2GT	204	102
208-2GT	208	104
210-2GT	210	105
212-2GT	212	106
214-2GT	214	107
216-2GT	216	108
220-2GT	220	110
224-2GT	224	112
226-2GT	226	113
228-2GT	228	114
230-2GT	230	115
232-2GT	232	116
236-2GT	236	118
240-2GT	240	120
242-2GT	242	121
244-2GT	244	122
248-2GT	248	124
250-2GT	250	125
252-2GT	252	126
254-2GT	254	127
256-2GT	256	128
258-2GT	258	129
260-2GT	260	130
264-2GT	264	132
266-2GT	266	133
268-2GT	268	134
270-2GT	270	135
278-2GT	278	139
280-2GT	280	140
282-2GT	282	141
284-2GT	284	142
286-2GT	286	143
288-2GT	288	144
290-2GT	290	145
292-2GT	292	146
294-2GT	294	147
300-2GT	300	150
302-2GT	302	151
304-2GT	304	152
308-2GT	308	154
310-2GT	310	155
314-2GT	314	157
318-2GT	318	159
320-2GT	320	160

Perimeter code	Belt circumference mm	Number of teeth
322-2GT	322	161
324-2GT	324	162
328-2GT	328	164
332-2GT	332	166
336-2GT	336	168
338-2GT	338	169
340-2GT	340	170
344-2GT	344	172
346-2GT	346	173
350-2GT	350	175
352-2GT	352	176
354-2GT	354	177
358-2GT	358	179
360-2GT	360	180
366-2GT	366	183
370-2GT	370	185
372-2GT	372	186
376-2GT	376	188
380-2GT	380	190
382-2GT	382	191
386-2GT	386	193
394-2GT	394	197
400-2GT	400	200
406-2GT	406	203
412-2GT	412	206
420-2GT	420	210
426-2GT	426	213
430-2GT	430	215
436-2GT	436	218
440-2GT	440	220
444-2GT	444	222
446-2GT	446	223
448-2GT	448	224
460-2GT	460	230
470-2GT	470	235
478-2GT	478	239
484-2GT	484	242
486-2GT	486	243
488-2GT	488	244
492-2GT	492	246
494-2GT	494	247
500-2GT	500	250
502-2GT	502	251
504-2GT	504	252
506-2GT	506	253
516-2GT	516	258
524-2GT	524	262
530-2GT	530	265
544-2GT	544	272
550-2GT	550	275
558-2GT	558	279
570-2GT	570	285
572-2GT	572	286
578-2GT	578	289

Perimeter code	Belt circumference mm	Number of teeth
586-2GT	586	293
598-2GT	598	299
600-2GT	600	300
606-2GT	606	303
616-2GT	616	308
630-2GT	630	315
634-2GT	634	317
646-2GT	646	323
660-2GT	660	330
670-2GT	670	335
676-2GT	676	338
690-2GT	690	345
696-2GT	696	348
702-2GT	702	351
726-2GT	726	363
742-2GT	742	371
752-2GT	752	376
760-2GT	760	380
772-2GT	772	386
782-2GT	782	391
800-2GT	800	400
810-2GT	810	405
852-2GT	852	426
860-2GT	860	430
866-2GT	866	433
892-2GT	892	446
900-2GT	900	450
930-2GT	930	465
950-2GT	950	575
976-2GT	976	488
994-2GT	994	497
1004-2GT	1,004	502
1028-2GT	1,028	514
1066-2GT	1,066	533
1068-2GT	1,068	534
1140-2GT	1,140	570
1164-2GT	1,164	582
1180-2GT	1,180	590
1210-2GT	1,210	605
1228-2GT	1,228	614
1234-2GT	1,234	617
1256-2GT	1,256	628
1310-2GT	1,310	655
1320-2GT	1,320	660
1344-2GT	1,344	672
1360-2GT	1,360	680
1660-2GT	1,660	830
1688-2GT	1,688	844
1700-2GT	1,700	850
1810-2GT	1,810	905
1850-2GT	1,850	925
1860-2GT	1,860	930
1910-2GT	1,910	955
2218-2GT	2,218	1,109

Copyright © CHENA INDUSTRIAL CO., LTD ALL RIGHTS RESERVED.