



Pitch : 8.0mm

S8M

material : CR synthetic rubber, fiberglass thread.
Use temperature -10~50 ° C.

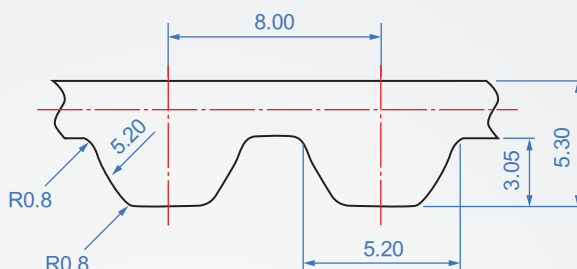

Width code	15	20	25	30	40	Unit weight (Width:1mm)
Ti Initial tension (N)	226	-	382	470	657	1.9 g/m
Td Pressing load (N)	15	-	25.5	31.3	43.8	

How to order

1 CR - 376 - S8M - 15
Material Belt circumference Width code

Belt chosen OPEN free length
For example: rubber
OPEN-S8M-25-4.7M-CR



47~125 teeth

Code	Belt circumference mm	Number of teeth
376-S8M	376	47
400-S8M	400	50
440-S8M	440	55
480-S8M	480	60
496-S8M	496	62
512-S8M	512	64
520-S8M	520	65
528-S8M	528	66
560-S8M	560	70
584-S8M	584	73
600-S8M	600	75
632-S8M	632	79
640-S8M	640	80
656-S8M	656	82
680-S8M	680	85
712-S8M	712	89
720-S8M	720	90
760-S8M	760	95
800-S8M	800	100
824-S8M	824	103
840-S8M	840	105
848-S8M	848	106
856-S8M	856	107
880-S8M	880	110
896-S8M	896	112
912-S8M	912	114
920-S8M	920	115
928-S8M	928	116
944-S8M	944	118
852-S8M	852	119
960-S8M	960	120
976-S8M	976	122
1000-S8M	1000	125



128~210 teeth

Code	Belt circumference mm	Number of teeth
1024-S8M	1024	128
1040-S8M	1040	130
1056-S8M	1056	132
1080-S8M	1080	135
1120-S8M	1120	140
1128-S8M	1128	141
1136-S8M	1136	142
1152-S8M	1152	144
1160-S8M	1160	145
1184-S8M	1184	148
1200-S8M	1200	150
1216-S8M	1216	152
1248-S8M	1248	156
1256-S8M	1256	157
1280-S8M	1280	160
1296-S8M	1296	162
1304-S8M	1304	163
1312-S8M	1312	164
1320-S8M	1320	165
1352-S8M	1352	169
1360-S8M	1360	170
1384-S8M	1384	173
1400-S8M	1400	175
1424-S8M	1424	178
1440-S8M	1440	180
1480-S8M	1480	185
1488-S8M	1488	186
1520-S8M	1520	190
1552-S8M	1552	194
1600-S8M	1600	200
1640-S8M	1640	205
1648-S8M	1648	206
1680-S8M	1680	210



212~550 teeth

Code	Belt circumference mm	Number of teeth
1696-S8M	1696	212
1728-S8M	1728	216
1760-S8M	1760	220
1776-S8M	1776	222
1792-S8M	1792	224
1800-S8M	1800	225
1816-S8M	1816	227
1832-S8M	1832	229
1880-S8M	1880	235
1912-S8M	1912	239
1960-S8M	1960	245
2000-S8M	2000	250
2040-S8M	2040	255
2048-S8M	2048	256
2064-S8M	2064	258
2104-S8M	2104	263
2120-S8M	2120	265
2160-S8M	2160	270
2240-S8M	2240	280
2272-S8M	2272	284
2304-S8M	2304	288
2400-S8M	2400	300
2496-S8M	2496	312
2600-S8M	2600	325
2800-S8M	2800	350
2920-S8M	2920	365
2944-S8M	2944	368
3048-S8M	3048	381
3200-S8M	3200	400
3272-S8M	3272	409
3440-S8M	3440	430
3680-S8M	3680	460
4400-S8M	4400	550