

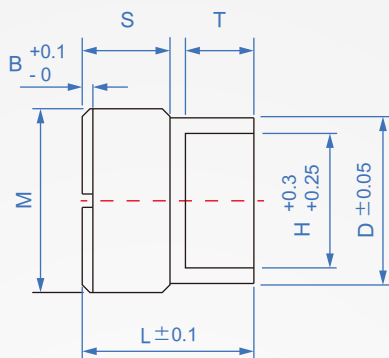


Bolt for adjusting pin
MS741
fine teeth




Material	hardness	surface deal with
SUM24L	HRC55	dye black

- The height of the push rod and push rod can be adjusted.
 - The thread spacing is small and the movement is smooth.
- Example: When matching (mold thimble)



How to order



1		2		unit: mm					
M	Pitch	H	T ^{+0.1} / _{+0.05}	L	S	A	B	D	
M8	1.0 (fine teeth)	4	4	12	6	1.1	1.3	6.5	
M10		6	4				1.4	8.5	
M12		8	4	14	7	1.2	1.6	10.5	
M14		10	4						
M16		11	4						
M20		15	4	16	8	1.3	1.8	14.5	
			8						1.4