
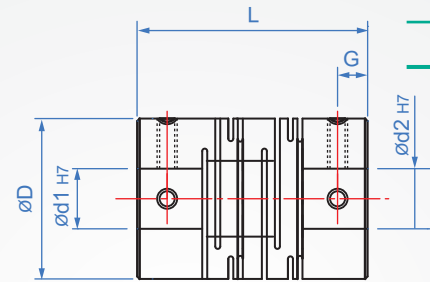


Slotted - economical long

GZ403

Stop payment



Ontology	Hexagon socket head cap screws
AL High strength aluminum alloy (White anode)	CM435 (Dye black)
SUS	SUS

How to order



Select the body material
 AL-High strength aluminum alloy...
 SUS.....

D	d1-d2	L	G		M		Maximum torque (N·m)		Maximum rotational speed (rpm)		moment of inertia (kg·m ²)		Static torsional spring coefficient (N·m/rad)		Allowable axial Displacement (mm)	Allowable declination angle	(g)	
			AL	SUS	AL	SUS	AL	SUS	AL	SUS	AL	SUS	AL	SUS				
12	2 ~ 6	18.5	2.5	2.5	M3	M2.5	0.5	0.75	30000	100000	8.3x10 ⁻⁸	7.6x10 ⁻⁸	31	60	±0.2	1.5°	3.7	14
16	3 ~ 8	23	3	2.8	M3	M2.5	0.5	0.9	24000	9500	3.3x10 ⁻⁷	9.0x10 ⁻⁷	44	84			8.1	23
*18	4 ~ 8	23	3.2	-	M3	-	0.8	-	24000	-	3.3x10 ⁻⁷	-	80	-			10	-
20	4 ~ 10	26	3.6	3.7	M4	M3	1	1.6	19000	7600	9.0x10 ⁻⁷	2.5x10 ⁻⁶	109	245			15	42
25	5 ~ 12	31	3.6	4.5	M4	M3	2	3	15000	6100	2.6x10 ⁻⁶	7.1x10 ⁻⁶	165	330			27	75
28	6 ~ 16	38	4.5	5.6	M5	M4	3	4.5	13000	5500	4.3x10 ⁻⁶	7.5x10 ⁻⁶	178	500			46	125
32	8 ~ 18	41	4.3	6.6	M5	M4	4	6	12000	4800	9.6x10 ⁻⁶	2.7x10 ⁻⁵	270	850			60	165
40	8 ~ 24	56	6	8	M6	M5	8	15	9400	3600	3.1x10 ⁻⁵	8.0x10 ⁻⁵	344	960			135	372
*42	8 ~ 25	56	6	-	M6	-	8.5	-	9000	-	3.1x10 ⁻⁵	-	420	-	165	-		

*This specification is only made of aluminum alloy.

Copyright © CHENA INDUSTRIAL CO., LTD ALL Rights Reserved.

Che Na

886-2688-3177

info@chena.com.tw

886-22688-3188
886-2688-3881~3

No.21, Guangrong St. Shulin Dist.,
New Taipei City 238 Taiwan (R.O.C.)