


Suspension type
FB261

| Material | Finish | Accessory |
|----------------------|-----------------|-----------------|
| AL Aluminum alloy | Clear anodizing | Clear anodizing |

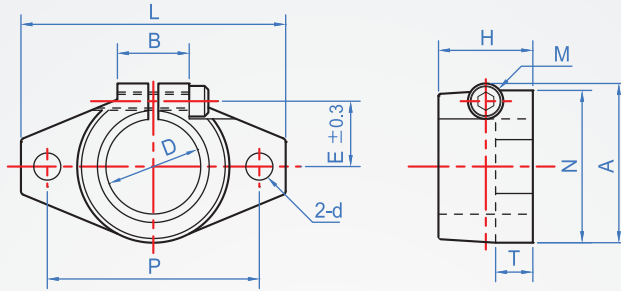

How to order

1
FB261 - 12
| |
TYPE D

| Unit : mm | | | | | | | | | | | | |
|-----------|-----|----|----|----|----|----|----|------|-----|-----|-------------|----|
| D | L | H | T | P | N | A | B | E | d | M | Quality (g) | |
| 10 | 43 | 10 | 5 | 32 | 20 | 24 | 18 | 9.5 | 5.5 | M4 | 13 | |
| 12 | 47 | 13 | 7 | 36 | 25 | 28 | | 11 | | | 20 | |
| 13 | | | | | | | | 12.5 | | | 27 | |
| 16 | 50 | 16 | 8 | 40 | 28 | 31 | 22 | 15 | 7 | M5 | 40 | |
| 20 | 60 | 20 | | 48 | 34 | 37 | | 17 | | | 60 | |
| 25 | 70 | 25 | 10 | 56 | 40 | 42 | | 21 | 9 | M6 | 110 | |
| 30 | 80 | 30 | 12 | 64 | 46 | 50 | | 25.5 | | | 12 | M8 |
| 35 | 92 | 35 | 14 | 72 | 50 | 58 | | 30 | M10 | 510 | | |
| 40 | 102 | 40 | 16 | 80 | 56 | 67 | | 38 | | M12 | | |
| 50 | 122 | 50 | 19 | 96 | 70 | 83 | | | | | | |