


Slotted - Economical long
GZ401
 Clamping



Ontology	Hexagon socket head cap screws
AL High strength aluminum alloy (White anode)	CM435 (Dye black)
SUS	SUS

How to order

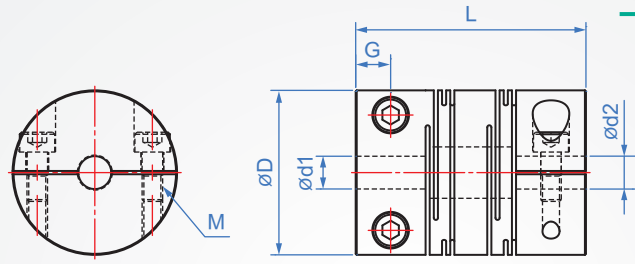

Select the body material
 AL-High strength aluminum alloy... Blank
 SUS..... SUS

D	Inner hole designation d1-d2		L	G	M	Max. torque (N · m)		Maximum return speed (rpm/min)		Moment of inertia (kg · m ²)		Static torsion spring coefficient (N · m/rad)		Allowable axial displacement (mm)	Weight(g)	
	min.	max.				AL	SUS	AL	SUS	AL	SUS	AL	SUS		AL	SUS
	unit : mm															
12	2	~ 6	18.5	2.5	M2.5	0.75	0.5	10000	10000	7.6x10 ⁻⁸	7.6x10 ⁻⁸	32	60	±0.2	4.8	14
16	3	~ 6	23	2.85		0.9		9500	9500	3.4x10 ⁻⁷	9.0x10 ⁻⁷	44	84		9.3	23
19	3	~ 8		3.75		1.6	1	7600	7600	9.1x10 ⁻⁶	2.5x10 ⁻⁶	100	245		13	38
20	4	~ 8	26	M3	3	2	6100	6100	2.6x10 ⁻⁶	7.1x10 ⁻⁶	165	330	16.5		42	
25	5	~ 12	31		4.46	4.5	3	5500	5500	4.5x10 ⁻⁶	7.5x10 ⁻⁶	180	500		29	75
28.5	6	~ 14	38		5.62	6	4	5000	4800	9.7x10 ⁻⁶	2.7x10 ⁻⁵	228	850		51	125
32	8	~ 16	41	6.6	M4	9.5	6.5	6500	3800	3.0x10 ⁻⁵	8.0x10 ⁻⁵	232	900		65	165
38	10	~ 20				15	8	5800	3600	3.3x10 ⁻⁵		232	900		107	260
40	10	~ 20				56	8	M5	15	8	5800	3600	3.3x10 ⁻⁵		340	960
50	10	~ 28	71	8.3	M6	23	23		3000	5800	9.0x10 ⁻⁵	2.7x10 ⁻⁴	580		1380	330

Allowable declination:1.5°