

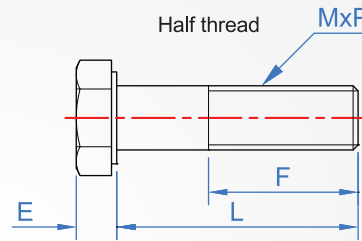


Hex head screw
WA713

Material	Hardness	Tensile strength	Yield strength	Strength distinction
SCM435 (Alloy steel)	33~38HRC (Black oxide)	800 N/mm ²	640 N/mm ²	8.8
SUS304	—	—	—	A2

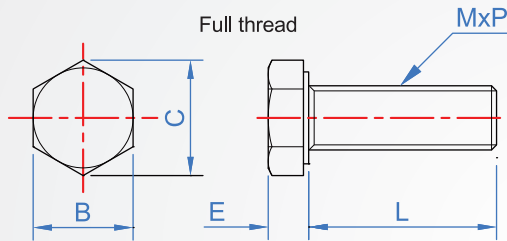

How to order



*M3, M4 only SUS304 material.

1																	2																	Unit: mm			
M	pitch																L																F	B	C	E	PCS/PKG
*M3	0.5	6	8	10	12	16	20	25	30									Full	5.5	6.01	2	100															
*M4	0.7	6	8	10	12	16	20	25	30	35	40	50						Full	7	7.66	2.8	100															
M5	0.8		8	10	12	16	20	25	30	35	40	50	30F	35F	40F	50F	60F	70F	80F	90F	Full	8	8.79	3.5	100												
M6	1.0		8	10	12	16	20	25	30	35	40	50	30F	35F	40F	50F	60F	70F	80F	90F	Full	10	11.05	4	100												
M8	1.25		8	10	12	16	20	25	30	35	40	50	35F	40F	50F	60F	70F	80F	90F	Full	13	14.38	5.3	100													
M10	1.5					16	20	25	30	35	40	50	40F	50F	60F	70F	80F	90F	Full	17	18.9	6.4	100 50														
M12	1.75					16	20	25	30	35	40	50	50F	60F	70F	80F	90F	Full	19	21.1	7.5	100 50															

※ Half thread in orange performance.

Units for the package get more preferential.

Copyright © CHENA INDUSTRIAL CO.,LTD ALL RIGHTS Reserved.