


Pressure angle 20°  
**M1.5** module




- GE** The standard gear (bar) does not have heat treatment, if heat treatment is required ~ can be specified (GH series).
- GH** The surface of the tooth part is treated with high frequency, the hardness is 43~45 degrees, and the strength and wear resistance will be better.
- GS** Ghana also provides SUS303 material, which has good rust resistance in high humidity environment.  
 ⚠ SUS have no finish, just provide material [GS].

Material	Accuracy class	Teeth finish
<b>GE</b> S45C Carbon steel	JIS 4 (DIN8e25)	Milling
<b>GH</b> S45C + Heat Treatment		
<b>GS</b> SUS303		

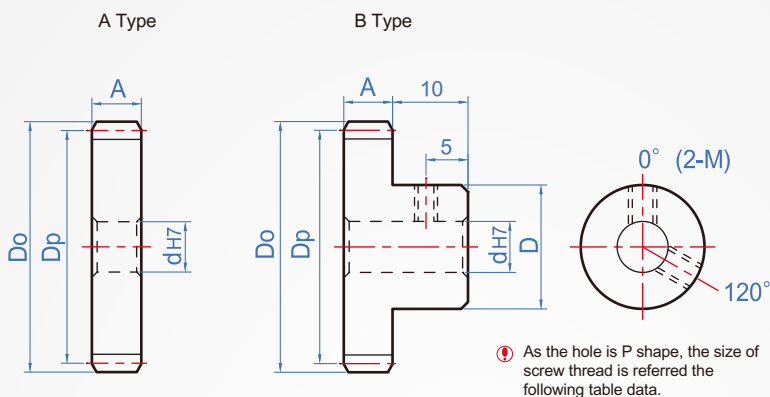

### How to order

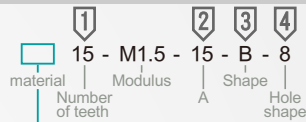


Choose material & surface treatment

SUS303.....	<b>GS</b>
S45C.....	<b>GE</b>
S45C+heat treatment.....	<b>GH</b>
S45C+blackened.....	<b>TB</b>
S45C+Hard chrome plating.....	<b>TC</b>
S45C+electless nickel.....	<b>TN</b>

**Inventory: fast delivery, low price**  
 Type B tooth width 20 is in stock  
 (with minimum hole diameter/no tapping)

Unit : mm										
1	2	3	4							
Number of teeth	Module	A	Shape	Hole shape	Mini. aperture d	D	Number of teeth	Dp	Do	
15	M1.5	12	A (For round holes only)	Circular aperture 	8~	18	15	22.5	25.5	
16						20	16	24	27	
17						20	17	25.5	28.5	
18						23	18	27	30	
19						24	19	28.5	31.5	
20						26	20	30	33	
21						27	21	31.5	34.5	
22						28	22	33	36	
23						30	23	34.5	37.5	
24						32	24	36	39	
25						33	25	37.5	40.5	
26						35	26	39	42	
27						36	27	40.5	43.5	
28						38	28	42	45	
29						39	29	43.5	46.5	
30						40	30	45	48	
31						42	31	46.5	49.5	
32						44	32	48	51	
33						45	33	49.5	52.5	
34						46	34	51	54	
35						48	35	52.5	55.5	
36						50	36	54	57	
37						50	37	55.5	58.5	
38						52	38	57	60	
39						52	39	58.5	61	
40						54	40	60	63	
41						55	41	61.5	64.5	
42						58	42	63	66	
43						58	43	64.5	67.5	
44						60	44	66	69	
45						62	45	67.5	70.5	
46						62	46	69	72	
47						62	47	70.5	73.5	
48						62	48	72	75	
49						65	49	73.5	76.5	
50						65	50	75	78	
55						65	55	82.5	85.5	
60						65	60	90	93	
65						65	65	97.5	97.5	
70						65	70	105	108	
75						65	75	112.5	115.5	
80						70	80	120	123	
85						70	85	127.5	130.5	
90						70	90	135	138	

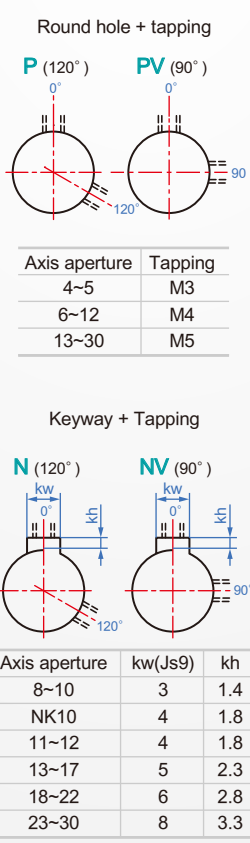

Copyright © CHENA INDUSTRIAL CO.,LTD ALL Rights Reserved.