

Brass Ring - Cross Type


KL433

Clamping




ontology	Buffer	screw
SUS304	Aluminum Bronze	CM435 (blackened)

Outer diameter $\varnothing 14.5 \sim \varnothing 45$

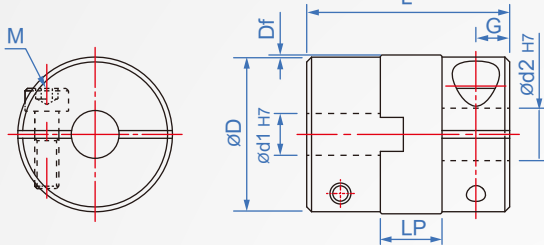

Outer diameter $\varnothing 55 \sim \varnothing 70$

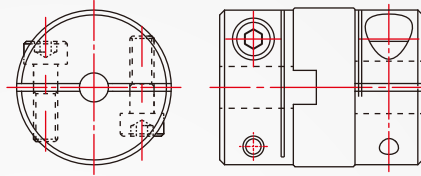

How to order



D	L	d1 · d2		Ds	LP	G	M	General Torque (N · M)	maximum torque (N · M)	Maximum speed (rpm/min)	moment of inertia (kg · m ²)	Static torsion spring constant (N · m/rad)	Allowable Axial Displacement	allowable deflection (°)	mass (g)	unit: mm	
		min.	max.														
14.5	19	4	~ 6.35	15	5.5	2.5	M2.5	0.8	3	8000	6.0x10 ⁻⁷	750	±0.2	0.6	17		
17	25	4	~ 6.35	17.5	6.2	3.3	M3	1.2	5	6500	1.2x10 ⁻⁶	1000			30		
20	27	5	~ 10	21	7.3	3.9			7	5500	3.0x10 ⁻⁶	2000			48		
26	31	5	~ 12	27	7.5	4	M4	2.5	10	4500	8.7x10 ⁻⁶	3800			90		
30	33	5	~ 14	31	8.8	4.3			24	4500	2.5x10 ⁻⁵	5000			120		
34	34	5	~ 16	35	8.5				32	3500	4.0x10 ⁻⁵	7000			172		
38	40	5	~ 20	41	9.7	5.3	M5	5	50	3500	5.2x10 ⁻⁵	10000			250		
45	46	8	~ 22	48	13.6	5.8			7000	1.8x10 ⁻⁴	35000	450					
55	57	10	~ 25	58	15.4	7	M6	8	75	7000	3.3x10 ⁻⁴	52000			0.5		800
70	77	12	~ 35	74	17.0	8.8	M8	20	95	6000	1.1x10 ⁻³	71200			1150		

Copyright © CHENA INDUSTRIAL CO., LTD ALL RIGHTS RESERVED.