


6

Steel ball latch

Basic

BL616

SUS

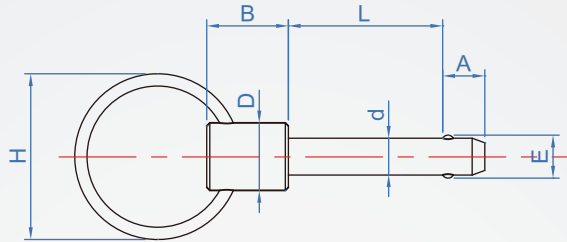

Steel ball	Pin	Spring	Ring
SUS	SUS303	SUS	SUS

How to order

BL616 - 10 - 30
 TYPE Diameter Length

1		2												unit: mm					
d ^{-0.04} _{-0.08}	E	L ^{+0.5} ₋₀												A _(±0.2)	B	H	D	Corresponding Hole	tolerance H8
5	5.2	10	15	20	25	30								8.4	9.2	24	8	5	+0.018
6	6.9	10	15	20	25	30	35	40	50					8.7			9.5	6	-0
8	10			20	25	30	35	40	50					8.5	12.7	30	11	8	+0.022
10	11.6			20	25	30	35	40	50	60	65	70		10			12.7	10	-0
12	15				25	30	35	40	50	60	65	70		12	14.2	30	16	12	+0.027
16	19.5				25	30	35	40	50	60	65	70	80	100			17	19	16

*L size length can be customized

Che Na

FAX 886-2688-3177

info@chena.com.tw

886-22688-3188
886-2688-3881~3

No.21, Guangrong St. Shulin Dist.,
New Taipei City 238 Taiwan (R.O.C.)

Copyright © CHENA INDUSTRIAL CO.,LTD ALL RIGHTS RESERVED.