


Shockproof foot FT980 Economical

©feature:Chena shockproof foot - non-slip type, suitable for automated machinery, transportation equipment, aluminum extrusion equipment ; Buried in the bottom of the rubber pad, also applies to slight shock mechanical.

Main part	Finish	Rubber	Hardness
Steel	White zinc plated	Non-polluting CR Synthetic rubber	Shore A70
	Electrodeposition coating-Black		
	Yellow Zinc Plated		
Stainless steel	Vibration grinding		

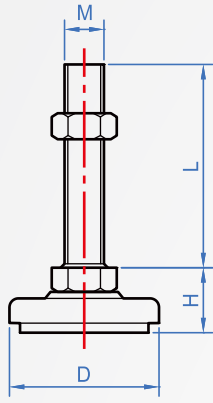

How to order

FT980 - M12 - 75 -

 TYPE M L

Material chosen
 Steel (white zinc plating)..... ZN
 Steel (Electrical Painting - Black).. BK
 Steel (Yellow Zinc Plated) YZP
 Stainless steel..... SUS

White zinc plated : ZN						Unit : mm	
M	Pitch	L	Total height	D	H	Load (kg)	
M12	1.75	75	103	55	28	300	
		100	128				
		150	178				
M16	2	80	110				
		100	130				
		130	160				
		150	180				
M20	2.5	180	210				
		200	230				
		80	110		30	500	
		100	130				
		130	160				
150	180						
180	210						
		200	230				

★Bottom with a rubber pad.

Black : BK						Unit : mm	
M	Pitch	L	Total height	D	H	Load (kg)	
M10	1.5	50	70	55	20	200	
		100	120				
M12	1.75	75	103				
		100	128				
		150	178				
M16	2.0	70	100				
		100	130				
		150	180				

★Bottom with a rubber pad.

Stainless steel : SUS						Unit : mm	
M	Pitch	L	Total height	D	H	(kg)	
M10	1.5	50	71	60	21	200	
		100	121				
M12	1.75	50	80				
		75	105				
		100	130				
		150	180				
M16	2.0	50	82				
		80	107				
		100	132				
		150	182				

★Bottom with a conductive rubber, rubber antistatic < 50KΩ

Yellow Zinc Plated : YZP White zinc plated : ZN						Unit : mm	
M	Pitch	L	Total height	D	H	Load (kg)	
M8	1.25	35	55	40	20	100	
		40	60				
		50	70				
		75	95				

★Bottom with a rubber pad.