


With Slit
SC470



Hex socket
head cap screws
DIN912

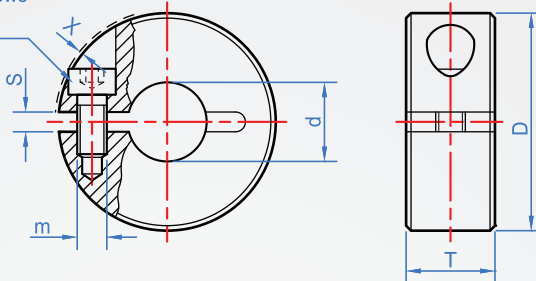

※Feature :

- ◆Semi-open fixed ring can be safe, simple assembly, it will not damage the shaft surface, high clamping force.
- ◆These collars not only as a stopper, they also can be used for fixed or lead to other components, such as ends limit switch.

Material	Finish
S45C	Black oxide
SUS303	—

◎With screw

How to order

SC470 - - - -

TYPE d D T

Material chosen

S45C.....

SUS303.....

1	2		3		Unit :mm	
d H10	D	T±0.2 Thickness	m Screw thread	S	X ≒ Protruding screw head	
6	20	9	M3	2.1	1.2	
8	22				1	
10	26				1.6	
12	30	11	M4		0.7	
14	32				1.4	
15 \ 16	36				0.6	
18 \ 20	42	15	M5	3	0	
22 \ 25	48				0.5	
28 \ 30	55				0.4	
32 \ 35	60		M6	4	0.4	
40	65				0.5	

※ About D parts size 20~36 , m is through hole ; Above 42 size is threaded blind hole.

※ Recommendation shaft tolerance h11 \ g6 °