


Flange Resin Ring - Cross Clamping

GZ433

Ontology	Cushioning material	Hexagon socket head cap screws
AL-High strength aluminum alloy (Anodizing)	POM	CM435 (Dye black)
SUS304		SUS

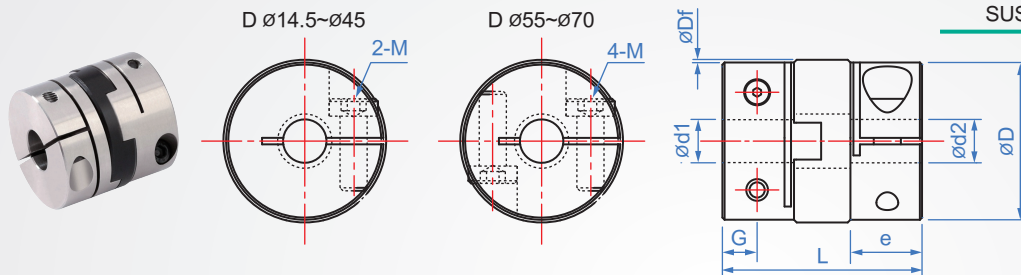

How to order

GZ433 - 20 - 5x8 -

TYPE D d1xd2

Select the body material

AL-High strength aluminum alloy... blank

SUS..... SUS

D	Inner hole designation d1-d2		Df	L	e	M	G	Max. torque (N · m)		highest return speed (rpm/min)	Moment of inertia (kg · m ²)		Static torsion spring coefficient (N · m/rad)	Allowable axial displacement (mm)	Allowable declination (°)	weight(g)	
	min.	max.						AL	SUS		AL	SUS				AL	SUS
	unit : mm																
14.5	4	~ 6	0.25	18.4	6.45	M2.5	3.3	1	1.6	8000	2.5x10 ⁻⁷	5x10 ⁻⁷	80	±0.12	2	8	17
17	4	~ 6	0.35	24.4	9.1	M3	4.2	1.3	2.2	6500	5x10 ⁻⁷	1x10 ⁻⁶	220			15	30
20	5	~ 10	0.5	27.2	9.95		4.5	2	3.2	5500	1.2x10 ⁻⁶	2.4x10 ⁻⁶	320			24	48
26	5	~ 12		30.4	11.45	M4	5	3.75	6	4500	4x10 ⁻⁶	8x10 ⁻⁶	400	45	90		
30	5	~ 14		33	12.1		6	9.5	15	3500	1x10 ⁻⁵	2x10 ⁻⁵	1100	±0.25	60	120	
34	5	~ 16	34	12.75	M5	7	17.5	28	7000	1.3x10 ⁻⁵	2.5x10 ⁻⁵	2200	86	172			
38	5	~ 20	40	15.15		6	19	30		3500	4x10 ⁻⁵	8x10 ⁻⁵	3200	125	250		
45	8	~ 20	1.5	46	16.2	M6	7	22	35	7000	9x10 ⁻⁵	1.8x10 ⁻⁵	3500	±0.35	2.2	250	450
55	10	~ 25		57	20.8		6	19	30		4200	2.6x10 ⁻⁴	3.3x10 ⁻⁴			4200	400
70	12	~ 35		2	77	30	M8	8.5	30	45	6000	2x10 ⁻³	4.1x10 ⁻³	5200	2.5	620	1150

Copyright © CHENA INDUSTRIAL CO.,LTD ALL RIGHTS RESERVED.