
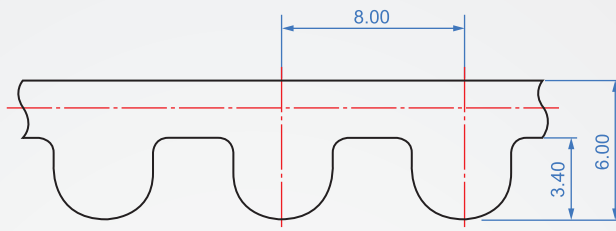


Pitch : 8.0mm

8M



2 Belt width	15	20	25	30	40	50	55	70	85	Unit weight (Width:1mm)
Ti Initial tension (N)	-	238	294	343	500	637	701	892	1100	6.1 g/m
Td Pressing load (N)	-	18	23	26	38	49	54	69	85	

## How to order

CR - 264 - 8M - 15  
 Material Belt Width code  
 circumference

Select belt OPEN free long  
 Example: rubber material  
 OPEN-8M-15-1.7M-CR

**material** : CR synthetic rubber, fiberglass thread.

Use temperature -10~50 ° C.

Code	Belt circumference mm	Number of teeth
264-8M	264	33
320-8M	320	40
376-8M	376	47
384-8M	384	48
416-8M	416	52
424-8M	424	53
480-8M	480	60
512-8M	512	64
520-8M	520	65
560-8M	560	70
576-8M	576	72
600-8M	600	75
608-8M	608	76
624-8M	624	78
640-8M	640	80
656-8M	656	82
672-8M	672	84
680-8M	680	85
720-8M	720	90
760-8M	760	95
776-8M	776	97
800-8M	800	100
840-8M	840	105
856-8M	856	107
880-8M	880	110
896-8M	896	112
912-8M	912	114
920-8M	920	115
936-8M	936	117
960-8M	960	120
968-8M	968	121

Code	Belt circumference mm	Number of teeth
976-8M	976	122
1000-8M	1,000	125
1040-8M	1,040	130
1056-8M	1,056	132
1064-8M	1,064	133
1080-8M	1,080	135
1120-8M	1,120	140
1128-8M	1,128	141
1152-8M	1,152	144
1160-8M	1,160	145
1176-8M	1,176	147
1184-8M	1,184	148
1192-8M	1,192	149
1200-8M	1,200	150
1216-8M	1,216	152
1224-8M	1,224	153
1248-8M	1,248	156
1256-8M	1,256	157
1264-8M	1,264	158
1280-8M	1,280	160
1304-8M	1,304	163
1320-8M	1,320	165
1360-8M	1,360	170
1392-8M	1,392	174
1400-8M	1,400	175
1424-8M	1,424	178
1432-8M	1,432	179
1440-8M	1,440	180
1480-8M	1,480	185
1212-8M	1,212	189
1520-8M	1,520	190

Code	Belt circumference mm	Number of teeth
1552-8M	1552	194
1584-8M	1584	198
1600-8M	1600	200
1680-8M	1680	210
1696-8M	1696	212
1728-8M	1728	216
1760-8M	1760	220
1800-8M	1800	225
1896-8M	1896	237
1904-8M	1904	238
1936-8M	1936	242
2000-8M	2000	250
2056-8M	2056	257
2080-8M	2080	260
2104-8M	2104	263
2160-8M	2160	270
2200-8M	2200	275
2240-8M	2240	280
2272-8M	2272	284
2400-8M	2400	300
2504-8M	2504	313
2600-8M	2600	325
2800-8M	2800	350
3048-8M	3048	381
880-8M	880	400
896-8M	896	410
912-8M	912	420
920-8M	920	450
936-8M	936	478
960-8M	960	550
968-8M	968	620