


Resin coupling-Oldham

CH432

Set screw

Main part	Cushioning material	Set screws
A6061 (Clear anodizing)	Engineering plastics	SCM435 (Black oxide)

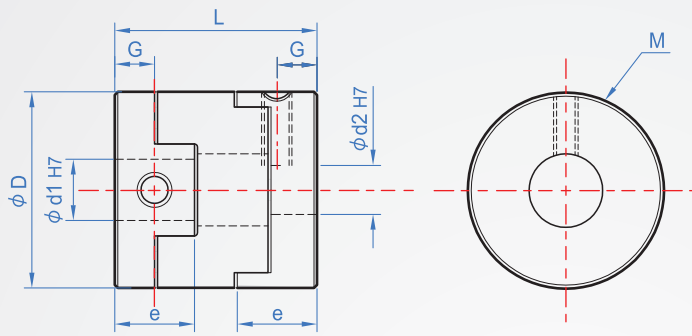

How to order

1 2
 CH432 - 16 - 4x5
 TYPE D d1xd2

Unit : mm													
D	d1 \ d2		L	G	e	M	Quality (g)	Torque (N · m)	Max. torque (N · m)	Highest number of rotations (rpm/min)	Moment of inertia (kg · m ²)	Allowable eccentric (mm)	Allowable declination (°)
	min.	max.											
16	4	~ 6.35	18	3.5	7	M3	7	0.7	1.4	9500	3.2 × 10 ⁻⁷	1.0	3
20	5	~ 8	22	4.5	10	M4	14	1.2	2.4	7600	1.0 × 10 ⁻⁶	1.5	
25	5	~ 10	28	5.5	12	M5	27	2.0	4.0	6100	3.0 × 10 ⁻⁶	2.0	
32	8	~ 14	33	6.5	14	M6	50	4.5	9.0	4800	9.5 × 10 ⁻⁶	2.5	
40	10	~ 16	35	7.0	15		80	9.0	18.0	3800	2.3 × 10 ⁻⁵	3.0	
50	14	~ 20	38	8.5	16.5	M8	150	18.0	36.0	3100	6.7 × 10 ⁻⁵	3.5	
63	15	~ 25	47	10.5	20.5	M10	300	36.0	72.0	2400	2.2 × 10 ⁻⁴	4.0	