


Thrust bearing Small

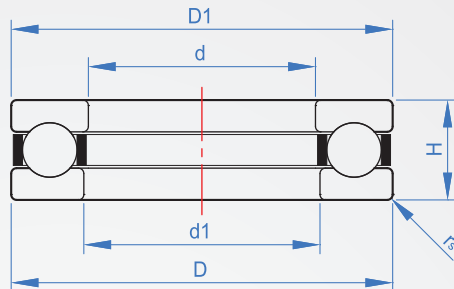

Material	Precision
Steel SUIJ2	JIS 0

※Track with groove

How to order

F4-9M
Code



Unit : mm

Code	d	D	d1	D1	r _s (min)	H	Rated load		Max. allowable the number of rotations (x1000rpm)		Steel ball		Weight (Reference)
							Ca(N)	Coa(N)	Grease	Oil	Quantity	Diameter	
F3-8M	3	8	3.2	7.8	0.15	3.5	993	590	19	28	6	1.588	0.9
F4-9M	4	9	4.2	8.8	0.15	4	944	640	17	25	6	1.588	1.2
F4-10M	4	10	4.2	9.8	0.15	4	925	661	16	24	6	1.588	1.5
F5-12M	5	12	5.2	11.8	0.2	4	1056	942	14	22	8	1.588	2.1
F6-12M	6	12	6.2	11.8	0.2	4.5	1819	1588	14	20	9	2	2.2
F6-14M	6	14	6.25	13.8	0.2	5	2155	1701	12	18	7	2.381	3.5
F7-13M	7	13	7.2	12.8	0.2	4.5	1767	1645	13	20	9	2	2.6
F7-17M	7	17	7.2	16.8	0.3	6	3086	2675	10	15	8	2.778	6.5
F8-16M	8	16	8.2	15.8	0.3	5	3917	3394	11	17	9	3	4.5
F8-19M	8	19	8.2	18.8	0.3	7	3939	3476	9	13	8	3.175	9.1
F9-20M	9	20	9.2	19.8	0.3	7	3855	3571	8	13	8	3.175	9.9
F10-18M	10	18	10.2	17.8	0.3	5.5	2470	2721	10	15	10	2.381	5.4

Copyright © CHENA INDUSTRIAL CO.,LTD ALL RIGHTS RESERVED.

Che Na

886-2688-3177

info@chena.com.tw

886-22688-3188
886-2688-3881~3

No.21, Guangrong St. Shulin Dist.,
New Taipei City 238 Taiwan (R.O.C.)