

KG-Keyless Pulleys

S8M

Pitch 8mm

Keyless Pulleys


Extra over product

Final product



Y


Bulge Type

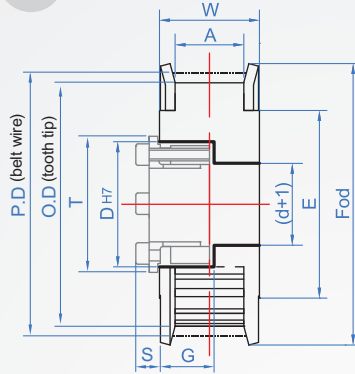

Z

Bury Type

When $(S+1)+G \geq W$ the bottom in through hole.



※KG series does not include the power lock. Please select in LP458 series if necessary.



Main Part	Flang	Finish
A6061	Aluminum	AS Clear anodizing
		AB Black anode
		AK Electroless nickel
		AN Electroless nickel
S45C	Iron	TB Black oxide
		TN Electroless nickel

How to order

KG - 36 - S8M-20 - Z22 -

① TYPE Number of teeth ② Tooth width ③ Wheel

Material and finish chosen

A6201+Clear anodizing.....	AS
A6201+Black anode.....	AB
A6201+Hard anodized.....	AK
A6201+Electroless nickel.....	AN
S45C+Black oxide.....	TB
S45C+Electroless nickel.....	TN

Number of teeth	Tooth width	Wheel	Type Y Applicable for aperture d					Type Z Applicable for aperture d			Number of teeth	P.D	O.D	E	Fod
			15	20	25	30	40	20	30	40					
18	S8M-15 A=17 W=22	Bulge type Y	8~12	8~12	8~12	8~12	8~12	8~10	8~10	8~10	18	45.84	44.46	35	50
19			8~16	8~16	8~16	8~16	8~16	8~12	8~12	8~12	19	48.38	47.01		
20			8~16	8~16	8~16	8~16	8~16	8~12	8~12	8~12	20	50.93	49.56	40	55
22			8~19	8~19	8~19	8~19	8~19	8~14	8~14	8~14	22	56.02	54.65	44	62
24			8~19	8~19	8~19	8~19	8~19	8~16	8~16	8~16	24	61.12	59.74	50	70
25			10~22	10~22	10~22	10~22	10~22	10~19	10~19	10~19	25	63.66	62.29		
26			10~22	10~22	10~22	10~22	10~22	10~19	10~19	10~19	26	66.21	64.84	55	75
28			10~22	10~22	10~22	10~22	10~22	10~19	10~19	10~19	28	71.3	69.93	60	80
30			10~25	10~25	10~25	10~25	10~25	10~22	10~22	10~22	30	76.39	75.02	65	85
32			10~25	10~25	10~25	10~25	10~25	10~28	10~28	10~28	32	81.49	80.12	70	90
34	10~30	10~30	10~30	10~30	10~30	10~28	10~28	10~28	34	86.58	85.21	75	95		
36	10~30	10~30	10~30	10~30	10~30	10~35	10~35	10~35	36	91.67	90.3				
38	10~35	10~35	10~35	10~35	10~35	10~35	10~35	10~35	38	96.77	95.39	85	105		
40	10~35	10~35	10~35	10~35	10~35	10~35	10~35	10~35	40	101.86	100.49	90	110		
42	10~35	10~35	10~35	10~35	10~35	10~35	10~35	10~35	42	106.95	105.58	95	115		
44	10~35	10~35	10~35	10~35	10~35	10~35	10~35	10~35	44	112.05	110.67	98	118		
46	10~45	10~45	10~45	10~45	10~45	10~45	10~45	10~45	46	117.14	115.77	105	125		
48	10~45	10~45	10~45	10~45	10~45	10~45	10~45	10~45	48	122.23	120.86				
50	10~45	10~45	10~45	10~45	10~45	10~45	10~45	10~45	50	127.32	125.95	110	135		
60	10~45	10~45	10~45	10~45	10~45	10~45	10~45	10~45	60	152.79	151.42	128	160		
70	10~45	10~45	10~45	10~45	10~45	10~45	10~45	10~45	70	178.25	176.88	157	188		
72	10~45	10~45	10~45	10~45	10~45	10~45	10~45	10~45	72	183.35	181.97				
80	10~55	10~55	10~55	10~55	10~55	10~55	10~55	10~55	80	203.72	202.35	180	210		
90	10~55	10~55	10~55	10~55	10~55	10~55	10~55	10~55	90	229.18	227.81	195	235		
100	10~55	10~55	10~55	10~55	10~55	10~55	10~55	10~55	100	254.65	253.28	220	260		

※CheNa can also design and manufacture parts other than the number of teeth and shaft diameter in the above table.

LP458 shaft sleeve size table

	Unit : mm																								
d徑	8	10	12	14	15	16	18	20	22	24	25	28	30	32	35	38	40	45	50	55	60	65			
D	21	23	26	28	29	30	32	38	40	42	43	46	48	50	57	60	62	67	72	77	82	87			
G	15				18				22	23	24			25	27	28			29						
S	6				6.5				8				8.5				10				10.5				11
T	23.5	25.5	28.5	30.5	31.5	32.5	34.5	42	44	46	47	50	52	54	62	65	67	72	77	83	87	92			