


Separate type
SC476

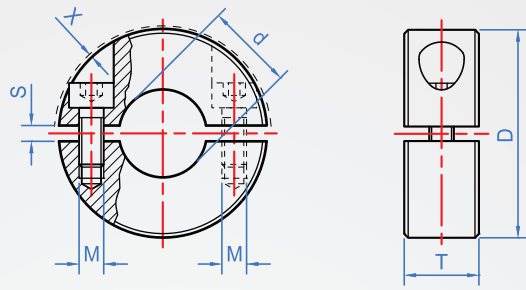

Material	Finish
S45C	Black oxide
SUS303	—

©With screw

How to order?

SC476 - 10 - 26 - 11 -

TYPE d D T

Material chosen

S45C.....

SUS303.....

- ※Feature :
- ◆Retaining ring of separate can be using on the long axis there is an obstacle not easily adopted, quick adjustment locking and have good mobility, it will not damage the shaft surface, high clamping force.
 - ◆These collars not only as a stopper, they also can be used for fixed or lead to other components, such as ends limit switch.

Unit :mm						
1	2	3				
d H10	D	T ±0.2 Thickness	M Coarse thread	S	X ≙ Protruding screw head	
6	20	9	M3	2.1	1.2	
8	22				1	
10	26				1.6	
12	30	11	M4	2.1	0.7	
14	32				1.4	
15 ∨ 16	36	13	M5	3	1.4	
18 ∨ 20	42				0.6	
22 ∨ 25	48				0	
28 ∨ 30	55		15	M6	4	0.5
32 ∨ 35	60					0.4
40	65					0.5

※ About D parts size 20~36 ∙ m is through hole ; Above 42 size is threaded blind hole.
 ※ Recommendation shaft tolerance h11 ∨ g6 ∙