


Linear Guideway

## LG213

Compact flang

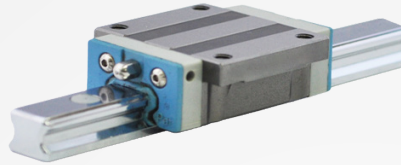

Material

Carbon steel  
HRC58~

Operating temperature

-30°C~80°C

Accuracy

- N Common
- H High quality
- P Accutate
- SP Hing accurate
- UP Extremely accurate


Preload

- ZF Micro gap
- Z0 0 Preload
- Z1 Light preload
- Z2 Median preload
- Z3 Heavy preload

How to order

1 2 3 4 Basic standard  
 LG213 - 2 - M - 24 - 1500 - ( N - Z0 )  
TYPE      B      H      L      Preload  
Number of sliders      Precision

※ When high precision is selected additionally, it needs to be marked after 4 (L length).

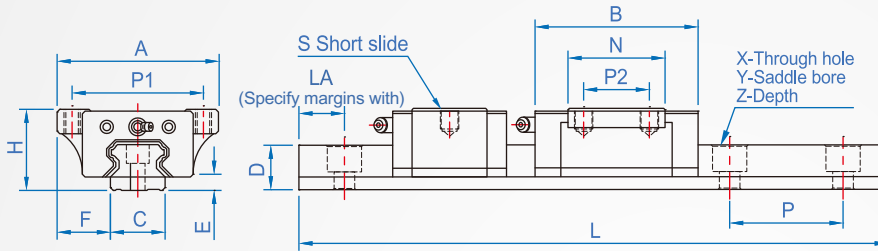

Slider No.	Slider length	B	H combination high	L (max)	Designated end LA	A	C	D	E	F	N	P	P1	P2	Mounting holes Mxℓ	Nozzle hole	X Through hole	Y Seat hole	Z Deep	Rated load(kN)		Static torque(kN•m)		weight(kg)									
																				C	Co	Mx	My (Mz)	Slider	Track(M)								
1 One Slider	S	40.6	24	1500	5-50	52	15	13	3.4	19	22.2	41	-	M5 - 26	M4 - P0.7	4.5	7.5	6	5.7	9.8	0.068	0.032	0.12	1.28									
	M	58.6																	11.5	19.6	0.136	0.117	0.19										
2 Two Sliders	S	48.3	28	3000	10~70	59	20	16	4.5	20	27.5	60	49	-	M6 - 32	M6 -	6	9.5	8.5	9.1	15.7	0.225	0.101	0.18	2.15								
	M	69.3																		17.7	30.5	0.285	0.22	0.31									
	S	54	33												73	23	19	5.8	25	32.3	60	-	M8 - 35	M8 -	7	11	9	12.7	21	0.225	0.101	0.33	2.88
	M	79.2																										24.8	41.1	0.44	0.352	0.5	

unit : mm