

KG-免鍵皮帶輪

S5M

齒距 5mm





本體材質	法蘭	表面處理
A6201	鋁	AS 白色陽極
		AB 黑色陽極
		AK 硬化陽極
		AN 無電解鍍
S45C	鐵	TB 染黑
		TN 無電解鍍

Y 凸型

Z 埋入型
當(S+1)+G≧W時底部是貫穿穴。

※軸套需另加購
(請參考LP458系列)

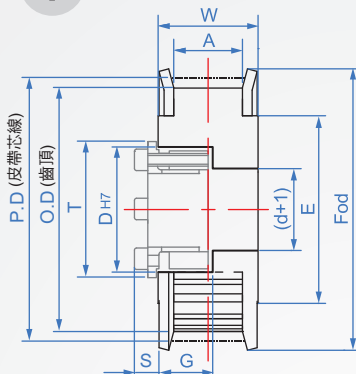

How to order



選擇材質及表面

A6201+白色陽極.....	AS
A6201+黑色陽極.....	AB
A6201+硬化陽極.....	AK
A6201+無電解鍍.....	AN
S45C+染黑.....	TB
S45C+無電解鍍.....	TN

齒數	齒形寬度	輪形	Y型 適用的軸孔 d徑				Z型 適用的軸孔 d徑			齒數	P.D	O.D	E	Fod
			10	15	20	25	15	20	25					
			8	8	8	8	-	-	-					
20	S5M-10 (A=11 W=16)	凸型 Y	8	8	8	8	-	-	-	20	31.83	30.87	24	35
22			8~10	8~10	8~10	8~10	8	8	8	22	35.01	34.05	28	40
24			8~10	8~10	8~10	8~10	8	8	8	24	38.2	37.24	30	42
25										25	39.79	38.83		45
26			8~12	8~12	8~12	8~12	8~10	8~10	8~10	26	41.38	40.42	34	47
28										28	44.56	43.6	37	49
30			8~16	8~16	8~16	8~16	8~12	8~12	8~12	30	47.75	46.79	40	52
32										32	50.93	49.97		55
34			8~19	8~19	8~19	8~19	8~16	8~16	8~16	34	54.11	53.15	44	62
36										36	57.3	56.34		45
38	10~22	10~22	10~22	10~22	8~12	8~12	8~12	38	60.48	59.52	52.5	67.5		
40								40	63.66	62.7		71		
42	8~12	10~25	10~25	10~25	8~12	8~12	8~12	42	66.85	65.89	58	71		
44								44	70.03	69.07		59	73	
46	10~22	10~30	12~30	12~30	10~19	10~19	10~19	46	73.21	72.25	60	80		
48								48	76.39	75.43		83		
50	10~25	10~35	14~35	14~35	10~19	10~19	10~19	50	79.58	78.62	65	85		
60								60	95.49	94.53		80	100	
70	10~30	14~50	14~50	14~50	10~19	10~19	10~19	70	111.41	110.45	98	118		
72								72	114.59	113.63		135		
80	10~30	14~60	14~60	14~60	10~19	10~19	10~19	80	127.32	126.36	110	135		
90								90	143.24	142.28		120	146	
100	100	159.15	158.21	130	165									

※上表中齒數與軸徑尺寸以外的部品，伽納也可以設計並製作。

■LP458軸套尺寸表

單位：mm

d徑	8	10	12	14	15	16	18	20	22	24	25	28	30	32	35	38	40	45	50	55	60	65
D	21	23	26	28	29	30	32	38	40	42	43	46	48	50	57	60	62	67	72	77	82	87
G	15		18			22		23		24		25		27		28		29				
S	6		6.5			8			8.5			10			10.5			11				
T	23.5	25.5	28.5	30.5	31.5	32.5	34.5	42	44	46	47	50	52	54	62	65	67	72	77	83	87	92