


吊環 經濟型

**YE769**

萬向旋轉

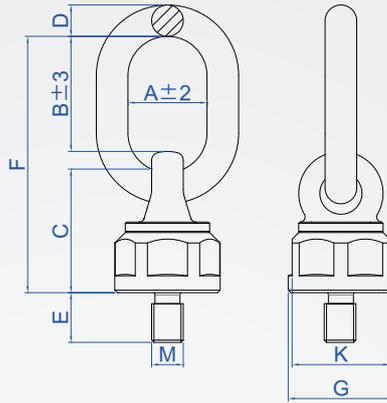

部位	材質
吊環	鍛造合金鋼
螺栓	合金鋼

How to order

↓  
YE769 - M12  
TYPE M

極限荷重 Tons	公制粗牙		美制粗牙		*E	D	B	A	G	K	C	F	鎖緊扭矩 N·m	質量 (kg)
	Pitch	UNC	UNC	UNC										
0.4	M8	1.25	5/16"	18	12								10-40	
0.6	M10	1.5	3/8"	16	19	12	44	30	40	37	46	98	15-40	0.5
0.7	M12	1.75	1/2"	13									30-100	
1.25	M14	2	—	—	31.8								45-130	
1.5	M16		5/8"	11										
1.9	M18	2.5	3/4"	10	30	16	54.5	34	59	54.5	64.5	132.5	100-170	1.4
2	M20		7/8"	9										
	M22	—	—										190-280	
3.15	M24-A	3	1"-A	8	38.1	20	67	40	70	64.3	76	160	250-500	2.5
4	M24-B	3	1"-B	8									270-600	
	M27	—	—											
5	M30	3.5	—	—	35	22	95	51	79	74	91	206	270-600	4
6	—	—	1-1/4"	7	50									
7.5	M33	3.5	—	—	50	26	108	65	93	85	100.5	230.5	350-800	
10	M36	4	1-1/2"	6	54									
	M39	—	—	—	58									
13	M42	4.5	—	—	63	26	108	65	93	85	100.5	230.5	350-800	5.9
	M45		1-3/4"	5	68								6	
14	M48	5	2"	4.5										6.3

\*E尺寸螺牙長度，可接受訂製。

※ 注意

- 配備鎖止扳手，鎖緊後，便捷安裝，鬆開後吊環即可旋轉。
- 不同受力方向，可起吊的載荷不同，但保證 4 倍安全係數。豎直方向起吊時，工作載荷大。
- 100% 經過 6g 通規檢驗合格，可適應於精密的螺紋孔。
- 螺紋規格齊全，額定載荷範圍廣可按客戶要求定制螺紋尺寸。
- 螺紋採用合金鋼 42CrMo 精鍛製成，熱處理前的抗拉強度  $\sigma_b$  為 1080MPa，調質後機械性能提高。吊環表面靜電噴塗，提高表面防腐能力。

■吊環載重表

懸掛圖示											懸掛圖示
支數	1	2	1	2	2	2	2	3~4	3~4	3~4	支數
載重角度	0°	0°	90°	90°	0°~45°	45°~60°	兩側非對稱	0°~45°	45°~60°	兩側非對稱	載重角度
M	載重極限 Tons										INCH
M8	0.6	1.2	0.4	0.8	0.6	0.4	0.4	0.8	0.6	0.4	5/16"
M10	0.9	1.8	0.6	1.2	0.8	0.6	0.6	1.3	0.9	0.6	3/8"
M12	1.2	2.4	0.7	1.4	1	0.7	0.7	1.5	1.1	0.7	1/2"
M14	2	4	1.25	2.5	1.8	1.3	1.3	2.6	1.9	1.3	—
M16	2.6	5.2	1.5	3	2.1	1.5	1.5	3.2	2.3	1.5	5/8"
M18	3	6	1.9	3.8	2.7	1.9	1.9	4	2.9	1.9	3/4"
M20	3.5	7	2	4	2.8	2	2	4.2	3	2	7/8"
M22	3.5	7	2	4	2.8	2	2	4.2	3	2	—
M24-A	5	10	3.15	6.3	4.4	3.2	3.2	6.6	4.7	3.2	1"
M24-B	7	14	4	8	5.6	4	4	8.4	6	4	1"
M27	7	14	4	8	5.6	4	4	8.4	6	4	—
M30	7	14	5	10	7	5	5	10.5	7.5	5	—
—	10	20	6	12	8.4	6	6	12.6	9	6	1-1/4"
M33	15	30	7.5	15	10.5	7.5	7.5	15.8	11.3	7.5	—
M36	15	30	10	20	14	10	10	21	15	10	1-1/2"
M39	15	30	10	20	14	10	10	21	15	10	—
M42	17	34	13	26	18.2	13	13	27.3	19.5	13	—
M45	17	34	13	26	18.2	13	13	27.3	19.5	13	1-3/4"
M48	18	36	14	28	19.6	14	14	29.4	21	14	2"

版權所有 重製必究