


一般型  
**BH551**



外型	材質	表面處理	軸承
F 圓形	鐵S45C	TB 染黑	SUJ2 (JIS 0級)
		TN 鍍無電解鎳	
H 二平面形	鋁A6061	AS 白色陽極	
		SUS303	

※沉頭孔尺寸請搭配低頭小徑螺絲使用。  
 ※沉頭孔貫穿部攻牙設計，正反二面皆可安裝使用。  
 ※附屬品C型扣環(SUS304)。

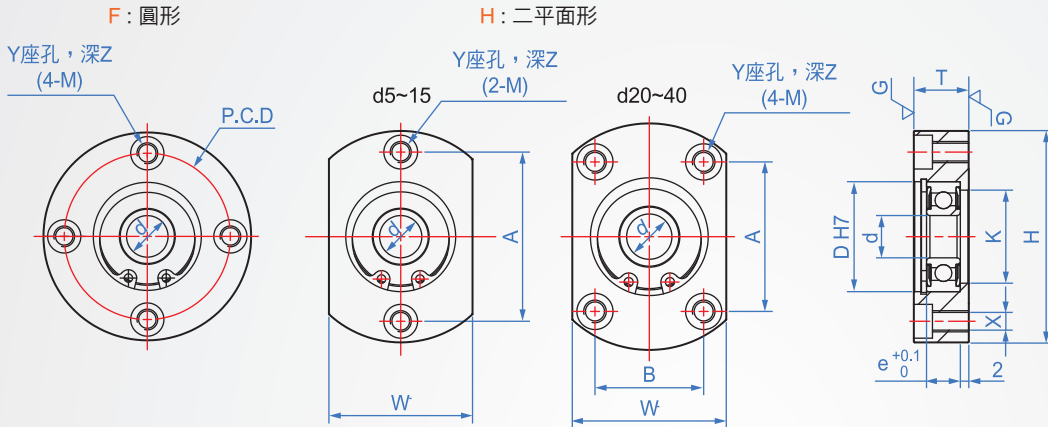

**How to order**

BH551 - [ ] - 605ZZ - [ ]

TYPE                      軸承代號

選擇外型  
 圓形..... F  
 二平面形..... H

選擇表面處理  
 鐵+染黑..... TB  
 鐵+鍍無電解鎳..... TN  
 鋁+白色陽極..... AS  
 SUS303..... SUS

軸承代號	d	D H7	容許公差	T	H	e	W	K	P.C.D	A	B	X (粗牙)	Y	Z		
605ZZ	5	14	+0.018 0	10	36	5	20	10	26	26	-	4.3 (M5×0.8)	8	4.4		
625ZZ		16			38		12	28	28							
606ZZ	6	17	11	39	13	29	29									
626ZZ		19		15	31	31										
698ZZ	8	22	12	45	7	29	18	35	35							
608ZZ		24		13	47	8	32	20	37	37						
628ZZ	10	22	+0.021 0	11	45	6	29	19	35	35						
6900ZZ		26			13	50	8	34	22	40		40				
6200ZZ	12	30	14	54	9	38	24	44	44							
6901ZZ		24		11	48	6	31	21	38	38						
6001ZZ	15	28	12	52	8	36	24	42	42							
6902ZZ		32		14	60	9	40	28	48	48						
6002ZZ	20	35	+0.025 0	17	64	11	44	29	52	52						
6202ZZ		37			15	69	9	47	34	56	51	24				
6904ZZ	25	42	18	77	12	54	36	64	56	32	6.8 (M8×1.25)	11	6.5			
6004ZZ		47		20	81	14	58	40	68	59				34		
*6005ZZ-TN	30	52	+0.030 0	18	88	12	58	41	72	63				8.5 (M10×1.5)	14	8.6
*6205ZZ-TN		55			22	94	15	64	45	78						
*6006ZZ-TN	35	62	20	96	13	66	48	80	70	40						
*6206ZZ-TN		23		104	16	74	55	88	77	44						
*6007ZZ-TN	40	68	21	104	14	74	55	88	75	44						
*6008ZZ-TN		23		114	15	82	60	96	80	54						

\* 軸承代號僅提供鐵材質