



active rotation
VC
width specification

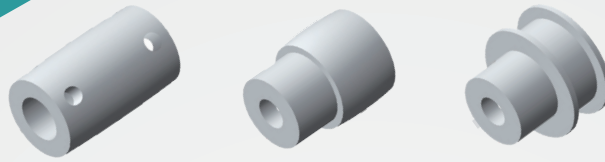

Ctype (barrel shape)

Dtype


DFtype (Flange type)

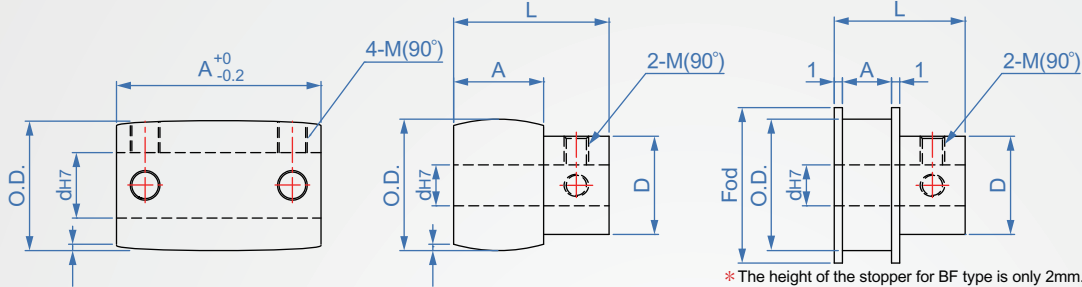

* The height of the stopper for BF type is only 2mm. When selecting the belt, please avoid it being higher than the baffle.

Material	surface treatment
S45C	TB blackened
	CR Hard chrome plating
A6061	AS white anode

How to order

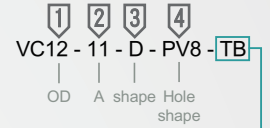

Select surface treatment

blackened.....	TB
Hard chrome plating.....	CR
white anode.....	AS

Copyright © CHENA INDUSTRIAL CO.,LTD ALL RIGHTS RESERVED.

								nut : mm							
1	2	3	4												
OD	A	shape	Hole shape	Shaft hole d Processing minimum value	D	L	Fod								
12	6~35 (hc=0.3)	C	Round hole + tapping PV (90°)	3~	6	8	16								
14				4~	10		18								
15				5~	12		19								
16					14		20								
18							22								
20							24								
22							26								
24							28								
25							29								
26							30								
28	36~125 (hc=0.8)	D	Keyway + Tapping NV (90°)	8~	16	8	32								
30							34								
32							36								
35							39								
40							44								
45							49								
50							54								
55							59								
60							64								
70							126~260 (hc=1)	DF	Keyway + Tapping NV (90°)	10~	20	12	74		
72	76														
80	84														
90	94														
100	104														
110	114														
120	124														
	261~400 (hc=1.2)	DF	Keyway + Tapping NV (90°)	15~	50	16							76		
													84		
													94		
							104								
							114								
							124								
							401~500 (hc=1.5)	DF	Keyway + Tapping NV (90°)	20~	60	16	114		
													124		

Axis aperture	Tapping
4~5	M3
6~12	M4
13~17	M5
18~30	M6
31~45	M8

Shaft bore	kw(Js9)	kh	Tapping
8~10	3	1.4	M4
NK10	4	1.8	
11~12	4		
13~17	5	2.3	M5
18~22	6	2.8	M6
23~30	8		
31~38	10	3.3	