



Slotted - economic short

GZ404

Stop payment

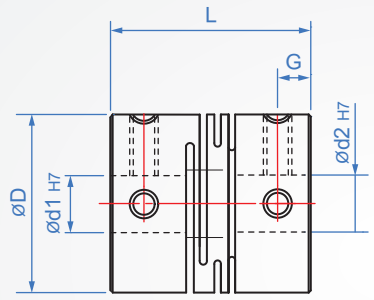

Ontology	
AL	High strength aluminum alloy (White anode)
SUS	

Hexagon socket head cap screws	
CM435	(Dye black)
SUS	

How to order



Select the body material
 AL-High strength aluminum alloy...
 SUS.....

D	Inner hole designation d1-d2		L	M	G	Max. torque (N · m)		Maximum return speed (rpm/min)		Moment of inertia (kg · m ²)		Static torsion spring coefficient (N · m/rad)		Allowable axial displacement (mm)	Weight(g)	
	min.	max.				AL	SUS	AL	SUS	AL	SUS	AL	SUS		AL	SUS
	unit : mm															
16	3	~ 8	16	M3	3	0.5	0.9	24000	22000	3.3x10 ⁻⁷	8.4x10 ⁻⁷	44	80	±0.2	6	21
20	4	~ 10	20	M4	3.2	1	1.6	19000	18000	9.0x10 ⁻⁷	2.4x10 ⁻⁶	109	235		12	30
25	4	~ 12	25		4	2	3	15000	14000	2.2x10 ⁻⁶	6.1x10 ⁻⁶	165	330		23	63
32	8	~ 18	32	M5	6	4	6	12000	10000	8.0x10 ⁻⁶	2.1x10 ⁻⁵	270	837		50	130
40	8	~ 24	50	M6		8	15	9600	9000	3.2x10 ⁻⁵	8.5x10 ⁻⁶	344	970		110	354

Allowable declination: 1.5°