


Pitch : 14.0mm

14M




材質：CR合成橡膠，玻璃纖維線。
使用溫度-10~50°C。

2

寬度

30 40 55 70 85 100 115 130

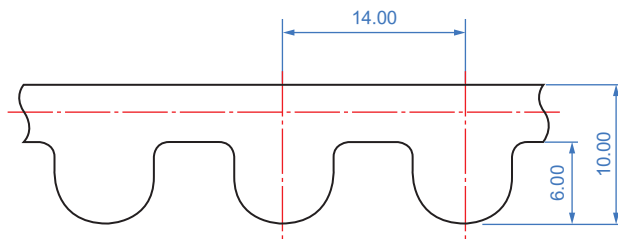

How to order

① ②
CR - 938 - 14M - 30
材質 皮帶 寬度
周長

選擇皮帶OPEN自由長，以米(M)單位
例：橡膠材
OPEN-14M-15-1.7M-CR

1

67~112齒

代號	皮帶周長 mm	齒數
938-14M	938	67
966-14M	966	69
1036-14M	1036	74
1050-14M	1050	75
1064-14M	1064	76
1092-14M	1092	78
1120-14M	1120	80
1148-14M	1148	82
1190-14M	1190	85
1246-14M	1246	89
1260-14M	1260	90
1288-14M	1288	92
1316-14M	1316	94
1344-14M	1344	96
1358-14M	1358	97
1400-14M	1400	100
1414-14M	1414	101
1442-14M	1442	103
1456-14M	1456	104
1470-14M	1470	105
1484-14M	1484	106
1512-14M	1512	108
1540-14M	1540	110
1568-14M	1568	112

1

115~190齒

代號	皮帶周長 mm	齒數
1610-14M	1610	115
1638-14M	1638	117
1652-14M	1652	118
1680-14M	1680	120
1736-14M	1736	124
1750-14M	1750	125
1764-14M	1764	126
1778-14M	1778	127
1792-14M	1792	128
1806-14M	1806	129
1820-14M	1820	130
1890-14M	1890	135
1904-14M	1904	136
1932-14M	1932	138
1946-14M	1946	139
1960-14M	1960	140
2002-14M	2002	143
2100-14M	2100	150
2198-14M	2198	157
2240-14M	2240	160
2310-14M	2310	165
2450-14M	2450	175
2590-14M	2590	185
2660-14M	2660	190

1

194~490齒

代號	皮帶周長 mm	齒數
2716-14M	2716	194
2800-14M	2800	200
2940-14M	2940	210
3108-14M	3108	222
3150-14M	3150	225
3304-14M	3304	236
3360-14M	3360	240
3500-14M	3500	250
3668-14M	3668	262
3850-14M	3850	275
4004-14M	4004	286
4326-14M	4326	309
4536-14M	4536	324
4578-14M	4578	327
4760-14M	4760	340
4956-14M	4956	354
5040-14M	5040	360
5320-14M	5320	380
5600-14M	5600	400
5740-14M	5740	410
5936-14M	5936	424
6160-14M	6160	440
6860-14M	6860	490

$$\text{齒輪節圓直徑(PD)} = \frac{P \times N}{\pi}$$

$$\text{齒輪外徑(OD)} = \text{PD} - 2 \times \text{PLD}$$

P : 皮帶齒距(mm) N : 皮帶齒輪齒數

L · PLD : 0.381mm π=3.14159

版權所有 重製必究