



Embedded type
WS608



Features :
Suitable for devices in narrow spaces.

Ontology	Bead	Spring
SUS303	SUS	SUS

Use temperature : max. 250 °C

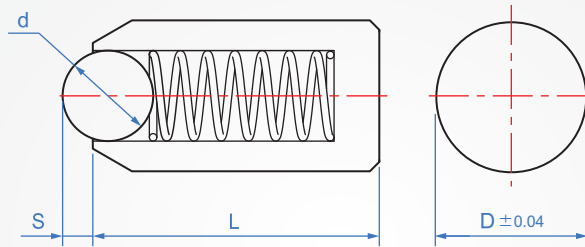

How to order

WS608- 3.5
| TYPE | D

D	d	L	S	Elasticity(N)		Weight (g)
				min.	max.	
3	2	7	0.65	4.5	7.5	0.4
3.5	2.5	9	0.8	6	14.5	0.6
4	3	11	0.9	8	14	0.8
4.5	3.3	12	0.95	9.5	16.5	1.1
5	3.5	13	1	11	18	1.5
5.5	4	14	1.2	15.5	25	1.9
6	4.5	15	1.5	18	31	2.3

Load : 1pound-force(1bs) = N x 4.45