


嵌入型
RT608
短頭



| | | |
|--------|-----|-----|
| 本體 | 珠子 | 彈簧 |
| SUS303 | SUS | SUS |

How to order

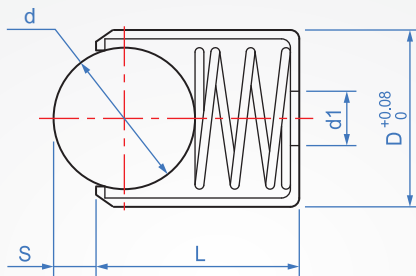

版權所有
重製必究

| 荷重 | D | L | | S | d | d1 | 輕荷重用彈力(N) L | | 重荷重用彈力(N) H | |
|-------------------|----|--------------|--------------|-----|------|-----|--------------------|------|--------------------|------|
| | | 輕荷重 L | 重荷重 H | | | | min. | max. | min. | max. |
| L (輕荷重) | 3 | 4 | - | 0.6 | 2 | 1 | 0.74 | 0.98 | - | - |
| | 4 | 5 | 6.5 | 0.8 | 3 | 1.5 | 0.65 | 5.6 | 3.1 | 8.7 |
| | 5 | 6 | 8 | 1.5 | 4 | 2 | 2.8 | 6.3 | 5.1 | 13.5 |
| | 6 | 7 | 9 | 1.6 | 5 | 2.5 | 2.95 | 9.6 | 5.3 | 16.5 |
| H (重荷重) | 8 | 9 | 12 | 1.9 | 6.35 | 3 | 6.5 | 11.7 | 8 | 28 |
| | 10 | 13 | 14.5 | 2.4 | 8 | | 9 | 15 | 13.5 | 30.5 |
| | 12 | 16 | - | 3.3 | 10 | | 13 | 25 | - | - |

單位: mm