


Basic


BL616

Short pull handle

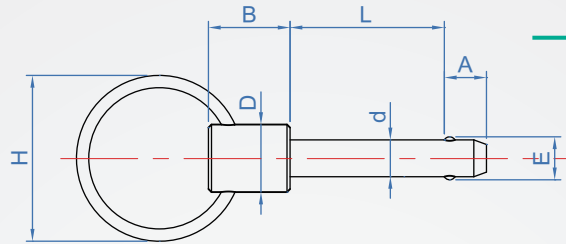

Steel ball	Pin	Spring	Ring
SUS	SUS303	SUS	SUS

structure map :



How to order

BL616 - 10 - 30
 TYPE Diameter Length

1													2		Unit : mm				
d ^{-0.04} _{-0.08}	E	Specify length L ^{+0.5} ₀											A ^(±0.2)	B	H	D	Corresponding hole	tolerances H8	
5	5.8	10	15	20	25	30							8.4	8.5	24	8	5	+0.018	
6	7	10	15	20	25	30	35	40	50				8.7	12.5		9.5	6	-0	
8	10		15	20	25	30	35	40	50				8.5	13	11	8	+0.022		
10	12		15	20	25	30	35	40	50	60	65	70	9		12.7	10	-0		
12	15		15	20	25	30	35	40	50	60	65	70	12	14	30	15	12	+0.027	
16	19		15	20	25	30	35	40	50	60	65	70	80		100	17	19	16	-0
20	25			20	25	30	35	40	50	60	65	70	80	100	19	45	22	20	+0.033
25	31				25	30	35	40	50	60	65	70	80	100	25		28.8	25	-0

*L size length can be customized