
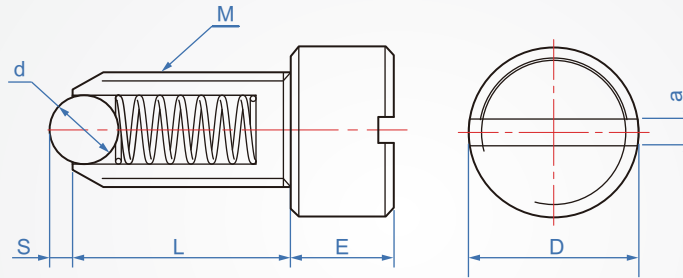


Positioning beads-with head

WA611

straight
shape

Example :



Main part

Ball

Steel - Black oxide


Steel

SUS303

SUS303

Spring : SUS304

How to order



Unit : mm

| M | a | D | d | S | L | E | Load (N) | |
|-----|-----|----|-----|-----|-----|-----|----------|------|
| | | | | | | | min. | max. |
| M4 | 1.2 | 6 | 2.5 | 0.8 | 6.5 | 3 | 8 | 14 |
| M5 | | 8 | 3 | 0.9 | 8.5 | 4 | | |
| M6 | | 10 | 3.5 | 1 | 9 | 5 | 11 | 18 |
| M8 | 2 | 13 | 4.5 | 1.5 | 11 | 5.5 | 18 | 31 |
| M10 | | 16 | 6 | 2 | 14 | 6 | 24 | 45 |
| M12 | | 18 | 8 | 2.5 | 15 | 7 | 26 | 49 |

kgf = N × 0.101972