

Locking screw

PR752

Prevent rotation



Material

Ball

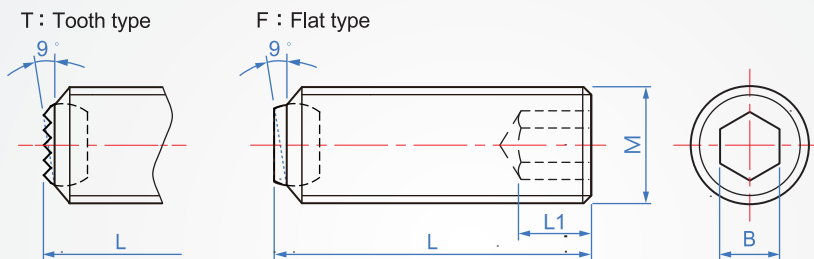
Steel
(Black oxide)

SUJ2

How to order

\downarrow 1 \downarrow 2
 PR752 - M6 - 10 - F
TYPE M L

The ball type No.

Flat type..... FTooth type..... T

1

2

單位 :mm

M	Pitch Coarse thread	L							B	L1	Load resistance (KN)			
M6	1.0	10	13	16	20	23			3	3.5	3.5			
M8	1.25		11	16	19	25	29		4	5	4			
M10	1.5		14	15	20	25	30	35	40	5	6	3.5		
M12	1.75				17	22	30	40	50	6	8	5		
M16	2.0					24	34	44	54	8	10	9		
M20	2.5						30	40	50	60	90	10	12	15
M24	3.0							35	50	80		12	14	20