


二用浮昇銷



GLP

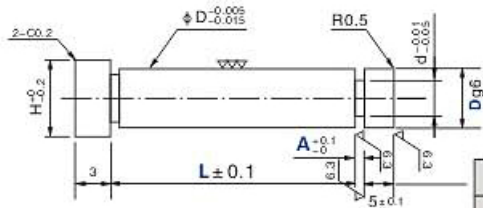

M 材質	SK4
H 硬度	53~58HRC

(頭緣部淬火處理硬度在45HRC以下)

H	d	Catalog No.			L	A
		Type	D	g6		
8	3.6	GLP	6	-0.004 -0.012	22 25 28 30 33 36	0.8 1.0 1.2
10	5		8	-0.005 -0.014	22 25 28 30 33 36 40	1.0 1.6 2.0
12	6		10		25 28 30 33 36 40 50	1.6 2.0 2.5
15	7		13	-0.006 -0.017	28 30 33 36 40 50	2.0 2.5 3.6
19	8		16		30 33 36 40 50 60	2.0 2.5 4.0