




精密固鎖螺帽
YSF
牙腹鎖定

※鎖定方式為螺紋半角30°角，三點式鎖定。

材質	硬度	螺紋精度	平面偏擺
SCM440	HRC28~32	ISO 4H (精車)	0.005mm
		ISO 4H (研磨)	0.002mm

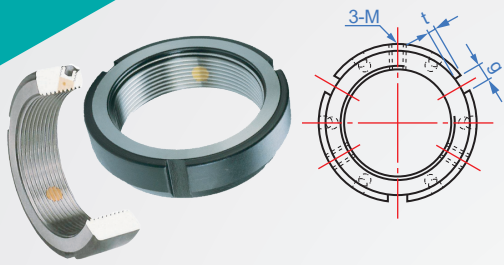

How to order



單位: mm

螺紋	Pitch	D	C	E	g	t	a	b	M	鎖緊力矩 max. Nm	軸向負載 Km	鬆脫力矩 Nm
M14	1.5											
M15	1	30	25	14					M5	4.5	-	-
M16	1.5								X			
M17	1								0.8		80	27.5
M18	1.5										-	-
M20	1										90	28.9
M20	1.5										90	-
M22	1.5	38	33			2				8	-	-
M24	1.5										-	-
M25	1.5								M6		130	30.4
M27	1.5	40	35						X		-	-
M30	1.5	45	40						1.0		160	32.4
M33	1.5	50	45								-	-
M35	1.5										190	39.2
M36	1.5A	52	47								-	-
M36	1.5										-	-
M40	1.5	58	52						M8		210	46.1
M42	1.5	62	56						X		-	-
M45	1.5	65	59			2.5			1.25		240	61.8
M48	1.5	70	64								-	-
M50	1.5										300	70.6
M52	1.5	73					63				-	-
M55	1.5	75	68				65				340	88.2
M56	2										-	-
M60	2	80	73			3	70				380	98
M64	2										-	-
M65	2	85	78				75	6			460	127.5
M68	2										-	-
M70	2	92	84				81		M8		490	147.1
M72	2	94	86				83		X		520	152
M75	2					3.5			1.25		-	-
M76	2	98	90				87				-	-
M80	2	105	96				93				620	156.9
M85	2	110	102				98				650	176.5
M90	2	120	108				105				680	186.3
M95	2	125	113				110				710	201
M100	2	130	118				115				740	220.6
M105	2	140	125				123				770	236.3
M110	2	145	132				128				800	252
M115	2	150	137				133	7			830	268.1
M120	2	155	142				138				860	279.4
M125	2	160	147				143				890	289.2
M130	2	165	152				148				920	313.7
M135	2	175	160				155				950	352.9
M140	2	180	165				160				980	392.2
M145	2	190	175				168				1010	436.3
M150	2	195	180				173				1040	480.4
M155	3	200					178				1070	519.6
M160	3	210	190				185				1100	563.7
M165	3						188				1130	598
M170	3	220	200				195	8			1160	647.1
M180	3	230	205				205				1220	686.3
M190	3	240	215				215				1280	735.3
M200	3	250	225				225				1340	794.1

版權所有 重製必究