

齒形惰輪 DU300 S5M


皮帶寬度(mm)	10	15	20	25
共通尺寸	A=11 W=16	A=17 W=22	A=22 W=27	A=27 W=32

本體	法蘭	表面處理	代碼
鋁合金	鋁材	白色陽極	AS
		黑色陽極	AB
		硬化陽極	AK
		無電解鍍	AN
S45C	鐵	染黑	TB
		無電解鍍	TN


Y 置中軸承

Z 二側軸承時


置中軸承

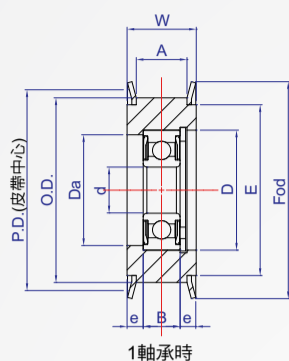

1軸承時



2軸承時



How to order

$DU - 20 - S5M - 10 - \square - \square$
 TYPE 齒數 齒形寬度 類型
 選擇表面處理
 鋁+白色陽極..... AS
 鋁+黑色陽極..... AB
 鋁+硬化陽極..... AK
 鋁+無電解鍍..... AN
 S45C+染黑..... TB
 S45C+無電解鍍..... TN

單位：mm

齒數	齒形寬度	類型	d	P.D	O.D	E	Fod	Y 軸承置中時					Z 二側軸承時																								
								No.	B	D	Da最大	e	C扣	No.	B	D	Da最大																				
15	S5M-10 A=11 W=16	Y (置中)	6	23.87	22.91	18	28	696ZZ	2pc	5	15	13.4	3	R15	606ZZ	2pc	6	17	15																		
16				25.46	24.5	20	32	606ZZ	1pc	6	17	15	5	R17																							
18				28.65	27.69	22.5	32	698ZZ	2pc	6	19	17	5	R19						698ZZ	6	19	17														
20				31.83	30.87	24	35																	628ZZ	8	24	22	4	R24	608ZZ	7	22	20				
22				35.01	34.05	28	40																	628ZZ										6900ZZ	6	22	20
24		38.2	37.24	30	42	6000ZZ	2pc	8	26	24	4	R26	6900ZZ	6	22	20																					
25		39.79	38.83	30	45												6200ZZ	9	30	25	3.5	R30	—														
26		41.38	40.42	34	47												6200ZZ																				
28		44.56	43.6	37	49	6201ZZ	1pc	10	32	27	3	R32	—																								
30		47.75	46.79	40	52																																
32		50.93	49.79	40	55																																
34		54.11	53.15	44	62																																
35		55.7	54.74	44	62																																
36		57.3	56.34	45	65	6202ZZ	1pc	9	32	30	3.5	R32	—																								
38		60.48	59.52	52.5	67.5																																
40	63.66	62.7	52.5	67.5																																	
42	66.85	65.89	59	73																																	
44	70.03	69.07	59	73																																	
18	S5M-15 A=17 W=22	Y (置中)	8	28.65	27.69	22.5	32	698ZZ	2pc	6	19	17	5	R19	698ZZ	2pc	6	19	17																		
20				31.83	30.87	24	35	628ZZ												8	24	22	3	R24	608ZZ	7	22	20									
22				35.01	34.05	28	40	6000ZZ																					8	26	24	3	R26	6900ZZ	6	22	20
24				38.2	37.24	30	42	6200ZZ												9	30	25	6.5	R30	6200ZZ	8	26	24									
25				39.79	38.83	30	45	6200ZZ																													
26		41.38	40.42	34	47	6201ZZ	1pc	10	32	27	6	R32	6001ZZ	2pc	8	28	26																				
28		44.56	43.6	37	49																																
30		47.75	46.79	40	52																																
32		50.93	49.97	40	55																																
34		54.11	53.15	44	62																																
35		55.7	54.74	44	62	6202ZZ	1pc	11	35	30	5.5	R35	6002ZZ	2pc	9	32	30																				
36		57.3	56.34	45	65																																
38		60.48	59.52	52.5	67.5																																
40		63.66	62.7	52.5	67.5																																
42		66.85	65.89	59	73																																
44	70.03	69.07	59	73																																	
18	S5M-20 A=22 W=27	Y (置中)	8	28.65	27.69	22.5	32	698ZZ	2pc	6	19	17	7.5	R19	698ZZ	2pc	6	19	17																		
20				31.83	30.87	24	35	628ZZ												8	24	22	5.5	R24	608ZZ	7	22	20									
22				35.01	34.05	28	40	6000ZZ																					8	26	24	5.5	R26	6900ZZ	6	22	20
24				38.2	37.24	30	42	6200ZZ												9	30	25	4.5	R30	6200ZZ	8	26	24									
25				39.79	38.83	30	45	6200ZZ																													
26		41.38	40.42	34	47	6201ZZ	1pc	10	32	27	3.5	R32	6201ZZ	2pc	9	30	25																				
28		44.56	43.6	37	49																																
30		47.75	46.79	40	52																																
32		50.93	49.97	40	55																																
34		54.11	53.15	44	62																																
35		55.7	54.74	44	62	6302ZZ	1pc	13	42	36	7	R42	6202ZZ	2pc	10	32	27																				
36		57.3	56.34	45	65																																
38		60.48	59.52	52.5	67.5																																
40		63.66	62.7	52.5	67.5																																
42		66.85	65.89	59	73																																
44	70.03	69.07	59	73																																	
18	S5M-25 A=27 W=32	Z (兩側)	8	28.65	27.69	22.5	32	698ZZ	2pc	6	19	17	5	R19	698ZZ	2pc	6	19	17																		
20				31.83	30.87	24	35	628ZZ												8	24	22	3	R24	608ZZ	7	22	20									
22				35.01	34.05	28	40	6000ZZ																					8	26	24	3	R26	6900ZZ	6	22	20
24				38.2	37.24	30	42	6200ZZ												9	30	25	4.5	R30	6200ZZ	8	26	24									
25				39.79	38.83	30	45	6200ZZ																													
26		41.38	40.42	34	47	6201ZZ	2pc	10	32	27	3.5	R32	6201ZZ	2pc	9	30	25																				
28		44.56	43.6	37	49																																
30		47.75	46.79	40	52																																
32		50.93	49.97	40	55																																
34		54.11	53.15	44	62																																
35		55.7	54.74	44	62	6202ZZ	2pc	10	32	27	3.5	R32	6201ZZ	2pc	10	32	27																				
36		57.3	56.34	45	65																																
38		60.48	59.52	52.5	67.5																																
40		63.66	62.7	52.5	67.5																																
42		66.85	65.89	59	73																																
44	70.03	69.07	59	73																																	

※ 10mm:(15*齒) 軸承置中時附 2個軸承。
 15mm:(18*~25*齒) 軸承置中時附 2個軸承。
 20mm:(18*~35*齒) 軸承置中時附 2個軸承。
 25mm:(18*~44*齒) 軸承置中時附 2個軸承。

版權所有 重製必究