
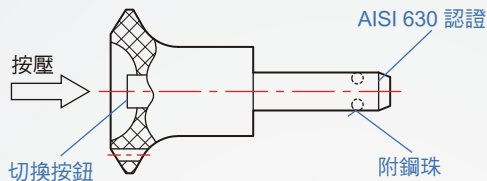



鋼珠插銷

BY616

圓頭型

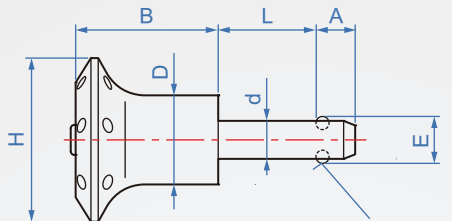

壓下按鈕後鋼珠縮入鎖銷內



球	銷	旋鈕	
		材質	使用溫度
SUS420C 55HRC	SUS303	工程塑膠 紅/黑	-30°C ~ 80°C

彈簧：SUS琴鋼線

How to order

BY616 - 5 - 30
 TYPE 銷徑 長度

																						單位：mm	
d ^{-0.04/-0.08}	E						L ^{+0.6/-0}					H	D	A ^(±0.2)	B ^(-0.2)	對應孔建議尺寸		抗剪力 (KN)min.					
5	5.5	10	15	20	25	30							30	16	6	26	5	+0.06	24				
6	7	10	15	20	25	30	35	40	45	50					7.1		6	-0	35				
8	9.5			20	25	30	35	40	45	50					8.2	32.5	8		63				
10	12			20	25	30	35	40	45	50	60				9.6		10	+0.08	100				
12	14.5				25	30	35	40	45	50	60	70	80		10.6		12	-0	144				
16	19					30	35	40	45	50	60			42	25	14	39		257				

*L尺寸長短可訂製