

齒形惰輪 DU300 AT5

皮帶寬度(mm)	10	15	20	25
共通尺寸	A=11	A=17	A=22	A=27
	W=16	W=22	W=27	W=32

本體	法蘭	表面處理	代碼
鋁合金	鋁材	白色陽極	AS
		黑色陽極	AB
		硬化陽極	AK
		無電解鍍	AN
		S45C	鐵
		無電解鍍	TN


Y 置中軸承

Z 二側軸承時


置中軸承



二側軸承

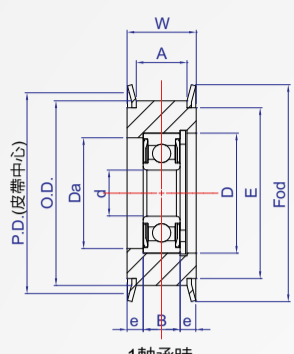

1軸承時

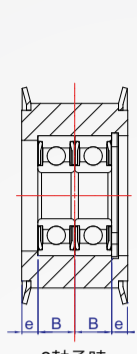

2軸承時

How to order

① ② ③
DU - 20 - AT5 - 10 - [] - []
TYPE 齒數 齒形寬度 類型

選擇表面處理

鋁+白色陽極.....	AS
鋁+黑色陽極.....	AB
鋁+硬化陽極.....	AK
鋁+無電解鍍.....	AN
S45C+染黑.....	TB
S45C+無電解鍍.....	TN

版權所有 重製必究

齒數	齒形寬度	類型	d	P.D	O.D	E	Fod	Y 軸承置中時					Z 二側軸承時						
								No.	B	D	Da最大	e	C扣	No.	B	D	Da最大		
15	AT5-10 A=11 W=16	Y (置中)	6	23.87	22.65	18	28	696ZZ	2pc	5	15	13.4	3	R15	606ZZ	6	17	15	
16				25.46	24.2	20	32	606ZZ	1pc	6	17	15	5	R17					
18		Z (兩側)	8	28.65	27.4	22.5	32	698ZZ	2pc	6	19	17	5	R19	698ZZ	6	19	17	
20				31.83	30.6	24	35												628ZZ
22		Y (置中)	10	35.01	33.75	28	40	6000ZZ	2pc	8	26	24	4	R26	6900ZZ	6	22	20	
24				38.2	36.95	30	42												6200ZZ
25		Z (兩側)	12	39.79	38.55	30	45	6201ZZ	1pc	10	32	27	3	R32	6200ZZ	—	—	—	
26				41.38	40.15	34	47												6201ZZ
28		Y (置中)	15	44.56	43.35	37	49	6002ZZ	2pc	9	30	25	3.5	R30	6002ZZ	—	—	—	
30				47.75	46.5	40	52												6002ZZ
32		Z (兩側)	8	50.93	49.7	40	55	6202ZZ	1pc	10	32	27	6	R32	6001ZZ	2pc	8	28	26
34				54.11	52.9	44	62												
35		Y (置中)	10	55.7	54.45	44	62	6202ZZ	2pc	11	35	30	5.5	R35	6002ZZ	2pc	9	32	30
36				57.3	56.05	45	65												
38		Z (兩側)	12	60.48	59.25	52.5	67.5	6302ZZ	1pc	13	42	36	7	R42	6202ZZ	2pc	10	32	27
40				63.66	62.45	44	62												
42	Y (置中)	15	66.85	65.6	59	73	6202ZZ	2pc	11	35	30	5	R35	6202ZZ	2pc	11	35	30	
44			70.03	68.8	59	73													6202ZZ
18	AT5-15 A=17 W=22	Y (置中)	8	28.65	27.4	22.5	32	698ZZ	2pc	6	19	17	5	R19	698ZZ	2pc	6	19	17
20				31.83	30.6	24	35												
22		Z (兩側)	10	35.01	33.75	28	40	6000ZZ	2pc	8	26	24	3	R26	6900ZZ	2pc	6	22	20
24				38.2	36.95	30	42												
25		Y (置中)	12	39.79	38.55	30	45	6201ZZ	1pc	10	32	27	6	R32	6001ZZ	2pc	8	26	24
26				41.38	40.15	34	47												
28		Z (兩側)	15	44.56	43.35	37	49	6202ZZ	2pc	11	35	30	5.5	R35	6002ZZ	2pc	9	30	25
30				47.75	46.5	40	52												
32		Y (置中)	8	50.93	49.7	40	55	6201ZZ	2pc	10	32	27	3.5	R32	6201ZZ	2pc	10	32	27
34				54.11	52.9	44	62												
35		Z (兩側)	10	55.7	54.45	44	62	6302ZZ	1pc	13	42	36	7	R42	6202ZZ	2pc	11	35	30
36				57.3	56.05	45	65												
38		Y (置中)	12	60.48	59.25	52.5	67.5	6202ZZ	2pc	11	35	30	5	R35	6202ZZ	2pc	11	35	30
40				63.66	62.45	44	62												
42		Z (兩側)	15	66.85	65.6	59	73	6202ZZ	2pc	11	35	30	5	R35	6202ZZ	2pc	11	35	30
44				70.03	68.8	59	73												

※ 10mm:(15*齒) 軸承置中時附 2個軸承。
15mm:(18*~25*齒) 軸承置中時附 2個軸承。
20mm:(18*~35*齒) 軸承置中時附 2個軸承。
25mm:(18*~44*齒) 軸承置中時附 2個軸承。