
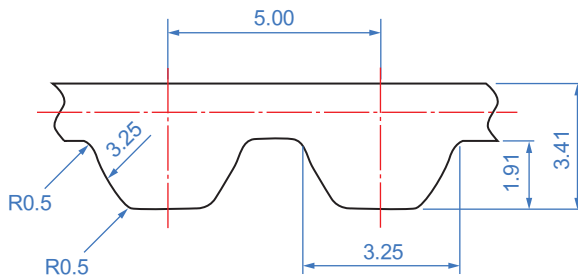


Pitch : 5.0mm

S5M



2 寬度代碼

寬度代碼	10	15	20	25	單位質量 (寬度:1mm)	材質	使用溫度
Ti 初張力 (N)	59	93	-	166	3.4 g/m	CR 合成橡膠	-10°C~50°C
Td 下壓荷重 (N)	3.9	6.2	-	11		PU 優力膠	-30°C~90°C

How to order



選擇皮帶OPEN自由長
例：橡膠材
OPEN-S5M-15-2.3M-CR

版權所有 重製必究

1 45~119齒

代號	皮帶周長 mm	齒數
225-S5M	225	45
230-S5M	230	46
255-S5M	255	51
260-S5M	260	52
275-S5M	275	55
295-S5M	295	59
300-S5M	300	60
305-S5M	305	61
320-S5M	320	64
325-S5M	325	65
340-S5M	340	68
345-S5M	345	69
350-S5M	350	70
360-S5M	360	72
370-S5M	370	74
375-S5M	375	75
380-S5M	380	76
390-S5M	390	78
400-S5M	400	80
415-S5M	415	83
425-S5M	425	85
435-S5M	435	87
440-S5M	440	88
450-S5M	450	90
475-S5M	475	95
490-S5M	490	98
500-S5M	500	100
520-S5M	520	104
525-S5M	525	105
530-S5M	530	106
545-S5M	545	109
550-S5M	550	110
560-S5M	560	112
575-S5M	575	115
590-S5M	590	118

1 120~217齒

代號	皮帶周長 mm	齒數
595-S5M	595	119
600-S5M	600	120
625-S5M	625	125
640-S5M	640	128
650-S5M	650	130
665-S5M	665	133
670-S5M	670	134
675-S5M	675	135
690-S5M	690	138
695-S5M	695	139
700-S5M	700	140
710-S5M	710	142
720-S5M	720	144
725-S5M	725	145
730-S5M	730	146
740-S5M	740	148
750-S5M	750	150
765-S5M	765	153
780-S5M	780	156
800-S5M	800	160
810-S5M	810	162
830-S5M	830	166
845-S5M	845	169
850-S5M	850	170
870-S5M	870	174
890-S5M	890	178
900-S5M	900	180
930-S5M	930	186
950-S5M	950	190
975-S5M	975	195
1000-S5M	1000	200
1025-S5M	1025	205
1050-S5M	1050	210
1055-S5M	1055	211
1085-S5M	1085	217

1 218~800齒

代號	皮帶周長 mm	齒數
1090-S5M	1090	218
1100-S5M	1100	220
1105-S5M	1105	221
1115-S5M	1115	223
1120-S5M	1120	224
1125-S5M	1125	225
1135-S5M	1135	227
1145-S5M	1145	229
1160-S5M	1160	232
1165-S5M	1165	233
1195-S5M	1195	239
1225-S5M	1225	245
1250-S5M	1250	250
1270-S5M	1270	254
1295-S5M	1295	259
1350-S5M	1350	270
1420-S5M	1420	284
1475-S5M	1475	295
1500-S5M	1500	300
1505-S5M	1505	301
1530-S5M	1530	306
1595-S5M	1595	319
1605-S5M	1605	321
1680-S5M	1680	336
1715-S5M	1715	343
1800-S5M	1800	360
2000-S5M	2000	400
2145-S5M	2145	429
2255-S5M	2255	451
2480-S5M	2480	496
2525-S5M	2525	505
3070-S5M	3070	614
3350-S5M	3350	670
4000-S5M	4000	800