

## 齒形惰輪 DU300 8YU

皮帶寬度(mm)	20	25	30	40
共通尺寸	A=22 W=27	A=28 W=33	A=33 W=38	A=44 W=49

本體	法蘭	表面處理	代碼
鋁合金	鋁材	白色陽極	AS
		黑色陽極	AB
		硬化陽極	AK
		無電解鍍	AN
S45C	鐵	染黑	TB
		無電解鍍	TN


Y 置中軸承

Z 二側軸承時


置中軸承



二側軸承

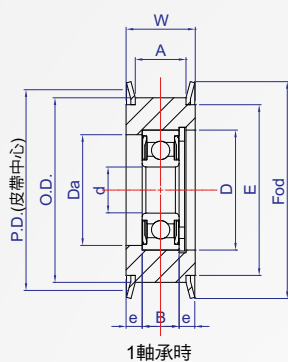

1軸承時



2軸承時

### How to order

1 2 3  
 DU - 20 - 8YU - 20 - [ ] - [ ]  
 TYPE 齒數 齒形寬度 類型  
 選擇表面處理  
 鋁+白色陽極..... AS  
 鋁+黑色陽極..... AB  
 鋁+硬化陽極..... AK  
 鋁+無電解鍍..... AN  
 S45C+染黑..... TB  
 S45C+無電解鍍..... TN

單位: mm

齒數	齒形寬度	類型	d	P.D	O.D	E	Fod	Y 軸承置中時					Z 二側軸承時														
								No.	B	D	Da最大	e	C扣	No.	B	D	Da最大										
20	8YU-20 A=22 W=27	Y (置中)	12	50.93	49.56	40	55	6201ZZ	10	32	27	8.5	R32	6201ZZ	10	32	27										
22				56.02	54.65	44	62																				
24				61.12	59.74	50	70																				
25				63.66	62.29	50	70																				
26				66.21	64.84	55	75																				
28				71.3	69.93	60	80																				
30		76.39	75.02	65	85																						
32		81.49	80.12	70	90	6202ZZ	11	35	30	8	R35	6202ZZ	11	35	30												
34		86.58	85.21	75	95																						
35		89.13	87.75	75	95																						
36		91.67	90.3	80	99																						
38		96.77	95.39	85	105																						
40		101.86	100.49	90	110																						
42		106.95	105.58	95	115	6204ZZ	14	47	41	6.5	R47	6004ZZ	12	42	38												
44		112.05	110.67	98	118																						
45		114.59	113.22	98	118																						
18	8YU-25 A=28 W=33	Z (兩側)	12	45.84	44.46											35	50	6201ZZ	10	32	27	6.5	R32	6201ZZ	10	32	27
20				50.93	49.56											40	55										
22				56.02	54.65											44	62										
24				61.12	59.74	50	70																				
25				63.66	62.29	50	70																				
26				66.21	64.84	55	75																				
28		71.3	69.93	60	80																						
30		76.39	75.02	65	85	6202ZZ	11	35	30	5.5	R35	6202ZZ	11	35	30												
32		81.49	80.12	70	90																						
34		86.58	85.21	75	95																						
35		89.13	87.75	75	95																						
36		91.67	90.3	80	99																						
38		96.77	95.39	85	105																						
40		101.86	100.49	90	110	6004ZZ	12	42	38	4.5	R42	6004ZZ	14	47	41												
42		106.95	105.58	95	115																						
44		112.05	110.67	98	118																						
45	114.59	113.22	98	118																							
18	8YU-30 A=33 W=38	Z (兩側)	12	45.84	44.46											35	50	6201ZZ	10	32	27	6.5	R32	6201ZZ	10	32	27
20				50.93	49.56											40	55										
22				56.02	54.65	44	62																				
24				61.12	59.74	50	70																				
25				63.66	62.29	50	70																				
26				66.21	64.84	55	75																				
28		71.3	69.93	60	80																						
30		76.39	75.02	65	85	6202ZZ	11	35	30	5.5	R35	6202ZZ	11	35	30												
32		81.49	80.12	70	90																						
34		86.58	85.21	75	95																						
35		89.13	87.75	75	95																						
36		91.67	90.3	80	99																						
38		96.77	95.39	85	105																						
40		101.86	100.49	90	110	6204ZZ	14	47	41	5	R47	6204ZZ	14	47	41												
42		106.95	105.58	95	115																						
44		112.05	110.67	98	118																						
45	114.59	113.22	98	118																							
18	8YU-40 A=44 W=49	Z (兩側)	12	45.84	44.46											35	50	6201ZZ	10	32	27	6.5	R32	6201ZZ	10	32	27
20				50.93	49.56											40	55										
22				56.02	54.65	44	62																				
24				61.12	59.74	50	70																				
25				63.66	62.29	50	70																				
26				66.21	64.84	55	75																				
28		71.3	69.93	60	80																						
30		76.39	75.02	65	85	6202ZZ	11	35	30	13.5	R35	6202ZZ	11	35	30												
32		81.49	80.12	70	90																						
34		86.58	85.21	75	95																						
35		89.13	87.75	75	95																						
36		91.67	90.3	80	99																						
38		96.77	95.39	85	105																						
40		101.86	100.49	90	110	6204ZZ	14	47	41	10.5	R47	6204ZZ	14	47	41												
42		106.95	105.58	95	115																						
44		112.05	110.67	98	118																						
45	114.59	113.22	98	118																							

版權所有 重製必究