

## 齒形惰輪 DU300 5GT

皮帶寬度(mm)	10	15	20	25
共通尺寸	A=11	A=17	A=22	A=27
	W=16	W=22	W=27	W=32

本體	法蘭	表面處理	代碼
鋁合金	鋁材	白色陽極	AS
		黑色陽極	AB
		硬化陽極	AK
		無電解鍍	AN
		無電解鍍	TN
S45C	鐵	染黑	TB
		無電解鍍	TN


Y 置中軸承

Z 二側軸承時


置中軸承



二側軸承

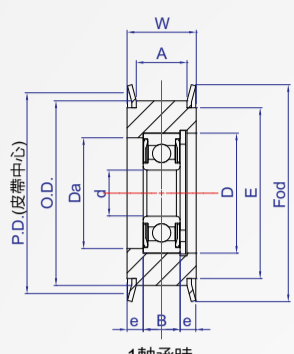

1軸承時



2軸承時

### How to order

① ② ③  
DU - 20 - 5GT - 10 - [ ] - [ ]  
TYPE 齒數 齒形寬度 類型

選擇表面處理

- 鋁+白色陽極..... AS
- 鋁+黑色陽極..... AB
- 鋁+硬化陽極..... AK
- 鋁+無電解鍍..... AN
- S45C+染黑..... TB
- S45C+無電解鍍..... TN

單位: mm

齒數	齒形寬度	類型	d	P.D	O.D	E	Fod	Y 軸承置中時					Z 二側軸承時						
								No.	B	D	Da最大	e	C扣	No.	B	D	Da最大		
15	5GT-10 A=11 W=16	Y (置中)	6	23.87	22.73	18	28	696ZZ	2pc	5	15	13.4	3	R15	606ZZ	6	17	15	
16				25.46	24.32	20	32	606ZZ	1pc	6	17	15	5	R17					
18		Z (兩側)	8	28.65	27.5	22.5	32	698ZZ	2pc	6	19	17	5	R19	698ZZ	6	19	17	
20				31.83	30.69	24	35												628ZZ
22		Y (置中)	10	35.01	33.87	28	40	6000ZZ	2pc	8	26	24	4	R26	6900ZZ	6	22	20	
24				38.2	37.05	30	42												6200ZZ
25		Z (兩側)	10	39.79	38.65	30	45	6200ZZ	2pc	9	30	25	3.5	R30	6200ZZ	—	—	—	—
26				41.38	40.24	34	47												
28		Y (置中)	12	44.56	43.42	37	49	6201ZZ	1pc	10	32	27	3	R32	6001ZZ	—	—	—	—
30				47.75	46.6	40	52												
32		Z (兩側)	12	50.93	49.79	44	55	6202ZZ	1pc	11	35	30	5.5	R35	6002ZZ	9	32	30	30
34				54.11	52.97	44	62												
35		Y (置中)	15	57.3	56.15	45	65	6302ZZ	1pc	13	42	36	7	R42	6202ZZ	11	35	30	30
36				60.48	59.34	52.5	67.5												
38		Z (兩側)	15	63.66	62.52	59	73	6202ZZ	1pc	11	35	30	5	R35	6202ZZ	11	35	30	30
40				66.85	65.7	59	73												
42	Y (置中)	8	70.03	68.89	59	73	698ZZ	2pc	6	19	17	7.5	R19	698ZZ	6	19	17		
44			28.65	27.5	22.5	32												698ZZ	6
18	5GT-15 A=17 W=22	Y (置中)	8	28.65	27.5	22.5	32	698ZZ	2pc	6	19	17	5	R19	698ZZ	6	19	17	
20				31.83	30.69	24	35												628ZZ
22		Z (兩側)	10	35.01	33.87	28	40	6000ZZ	2pc	8	26	24	3	R26	6900ZZ	6	22	20	
24				38.2	37.05	30	42												6000ZZ
25		Y (置中)	10	39.79	38.65	30	45	6200ZZ	2pc	9	30	25	6.5	R30	6200ZZ	8	26	24	
26				41.38	40.24	34	47												6200ZZ
28		Z (兩側)	12	44.56	43.42	37	49	6201ZZ	1pc	10	32	27	6	R32	6001ZZ	9	30	25	
30				47.75	46.6	40	52												6201ZZ
32		Y (置中)	12	50.93	49.79	44	55	6202ZZ	1pc	11	35	30	5.5	R35	6002ZZ	8	28	26	
34				54.11	52.97	44	62												6202ZZ
35		Z (兩側)	15	57.3	56.15	45	65	6302ZZ	1pc	13	42	36	7	R42	6202ZZ	9	32	30	
36				60.48	59.34	52.5	67.5												6302ZZ
38		Y (置中)	15	63.66	62.52	59	73	6202ZZ	1pc	11	35	30	5.5	R35	6202ZZ	11	35	30	
40				66.85	65.7	59	73												6202ZZ
42		Z (兩側)	15	70.03	68.89	59	73	6202ZZ	1pc	11	35	30	5	R35	6202ZZ	11	35	30	
44				28.65	27.5	22.5	32												698ZZ

※ 10mm:(15\*齒) 軸承置中時附 2個軸承。  
15mm:(18\*~25\*齒) 軸承置中時附 2個軸承。  
20mm:(18\*~35\*齒) 軸承置中時附 2個軸承。  
25mm:(18\*~44\*齒) 軸承置中時附 2個軸承。