


硬頂止付螺絲

WA755

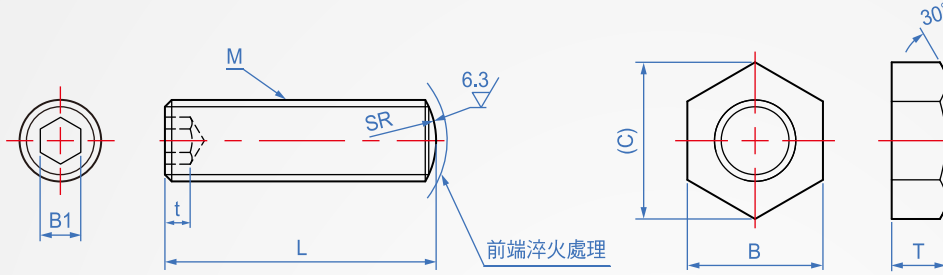

螺絲本體		螺帽
材質(表面)	硬度	
S45C (鍍三價鉻)	HRC45~50	SS400 (鍍三價鉻)
SUS304	-	SUS304
SUS420J2	HRC45~	

SUS420J2材料在前端部淬火後會有變色的痕跡。

How to order

WA755 - M4 - F - 15 -

TYPE 螺紋 Pitch 長度

選擇材質

S45C.....

SUS304.....

SUS420J2.....

M	Pitch		L													內六角			螺帽			
	F (細牙)	P (粗牙)														B1	t	SR	B	(C)	T	
	單位:mm																					
M3	0.35	0.5	10	15	20	25	30	35	40								1.5	1.5	3	5.5	6.4	2.4
M4	0.5	0.7	10	15	20	25	30	35	40	45	50	60					2	2.2	4	7	8.1	
M5	0.5	0.8	10	15	20	25	30	35	40	45	50	60					2.5	2.8	5	8	9.2	4
M6	0.75	1		15	20	25	30	35	40	45	50	60					3	3	6	10	11.5	
M8	0.75	1.25			20	25	30	35	40	45	50	60					4	4	8	13	15	5
M10	1	1.5				25	30	35	40	45	50	60	70	80	90	100	5	5	10	17	19.6	
M12	1	1.75					30	35	40	45	50	60	70	80	90	100	6	6	12	19	21.9	6
M16	1.5	2						40	45	50	60	70	80	90	100	120	8	7	16	24	27.7	8
M20	1.5	2.5							45	50	60	70	80	90	100	120	10	8	20	30	34.6	10

版權所有 重製必究